
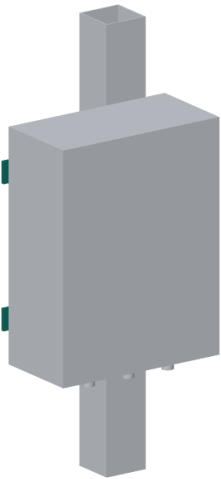



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

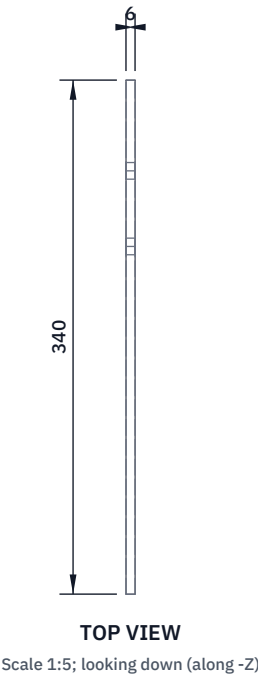

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 340 mm of 40 x 6 flat bar; round the corners.
Positions from the street end, on the centre line of the 40 mm face:
two 11 mm holes at 230 and 280 mm, countersunk on the outer face for M10 countersunk bolts (through the post);
two 5 mm holes at 40 and 300 mm, tapped M6 (enclosure screws).
Fit: flat on the outer side face of the rear right post, level, centred 1,520 and 1,780 mm up; the bolts' heads must sit flush so the enclosure's back lies flat on both rails.
Check: a straight edge across both rails touches all along.

CoolShade enclosure rail (make 2): making sketch

DRAWING NO. CSH-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel flat bar 40 x 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	