



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

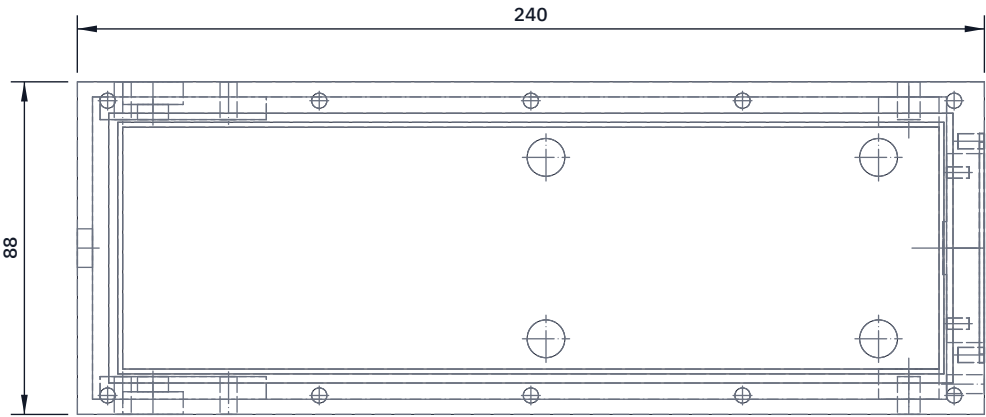


TOP VIEW

Scale 1:2; looking down (along -Z)

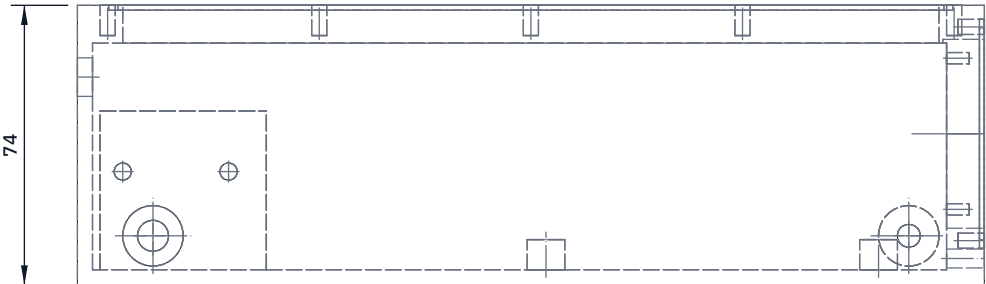


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

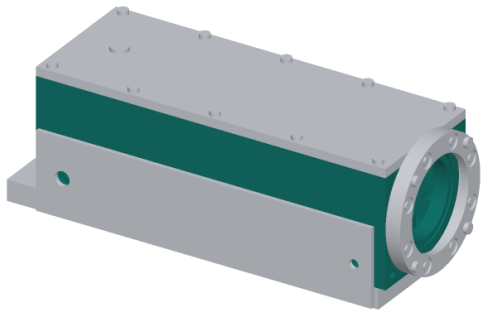

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Machine from a 240 x 88 x 80 mm block of 6061; finish 240 x 88 x 74 mm.

Pocket from the top: 4 mm floor, side and rear walls; 10 mm front wall.

Leave a rim 12 mm wide and 10 mm deep inside the top all round, drive pads 6 mm thick on the side walls at the rear (gearbox faces), idler bosses 16 mm across, 8 mm proud, and four floor pads 10 mm across and 8 mm tall for the tray. Hole positions: hull-holes picture.

Rim top: O-ring groove 2.4 wide x 1.3 deep, 8.3 mm in from the outside; ten M4 tapped holes 8 deep, 5 mm in from the outside edge.

Side walls: 8.2 mm shaft bore and 16 mm seal counterbore 6 deep from outside; two 4.5 mm gearbox screw holes; M6 idler hole 10 deep.

Front wall: 50 mm camera bore; O-ring groove 56 to 61 mm across, 1.3 deep; four M4 bezel holes 7 deep; 5 mm lead hole; M3 camera holes.

Rear wall: 10.2 mm penetrator hole on the centre line, 55 mm up from the bottom.

Check: leak test at 20 kPa with the lid, plug and blanks fitted.

CULVERTCRAWL

github.com/BoujeeEnjinia1701/culvertcrawl

CulvertCrawl hull body: making sketch

DRAWING NO. CVC-DWG-101		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 aluminium block 240 x 88 x 80 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	