



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

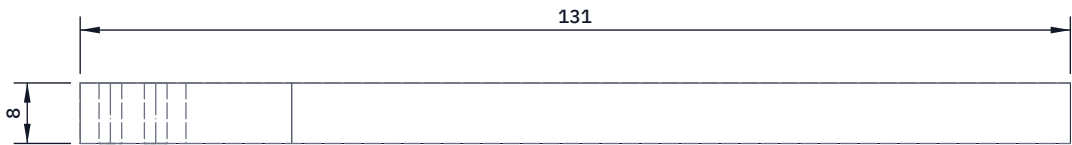


TOP VIEW
Scale 1:1; looking down (along -Z)

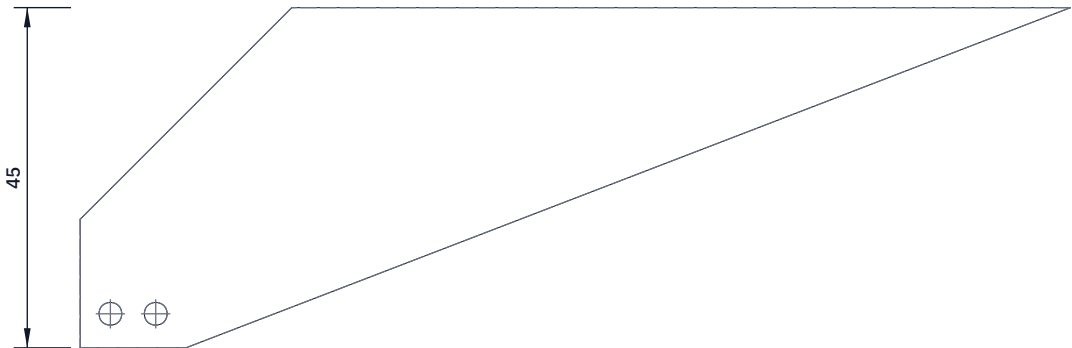

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

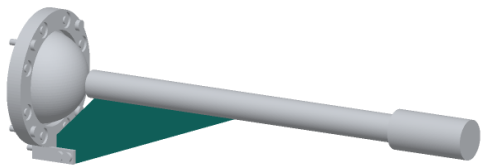

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut or saw and file from 8 mm clear cast acrylic.

Outline, measured from the bezel front face (x) and up from the track contact line (z): (1, 8), (15, 8), (132, 53), (29, 53), (1, 25).

The top edge from 29 to 132 lies under the boom; the sloping back edge keeps 4 mm from the dome.

Two 3.2 mm holes 4.5 mm up, 4 and 10 mm from the back edge.

Polish the top edge flat and square for bonding.

Fit: left face of the bracket's forward leg on the fin's right face, two M3 x 16 bolts with nyloc nuts.

The boom is solvent-welded along the top edge (see the boom sketch).

Check: the fin stands square to the hull top.

CULVERTCRAWL				github.com/BoujeeEnjinia1701/culvertcrawl			
CulvertCrawl boom fin: making sketch							
DRAWING NO. CVC-DWG-109				REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES Clear cast acrylic sheet 8 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	