


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

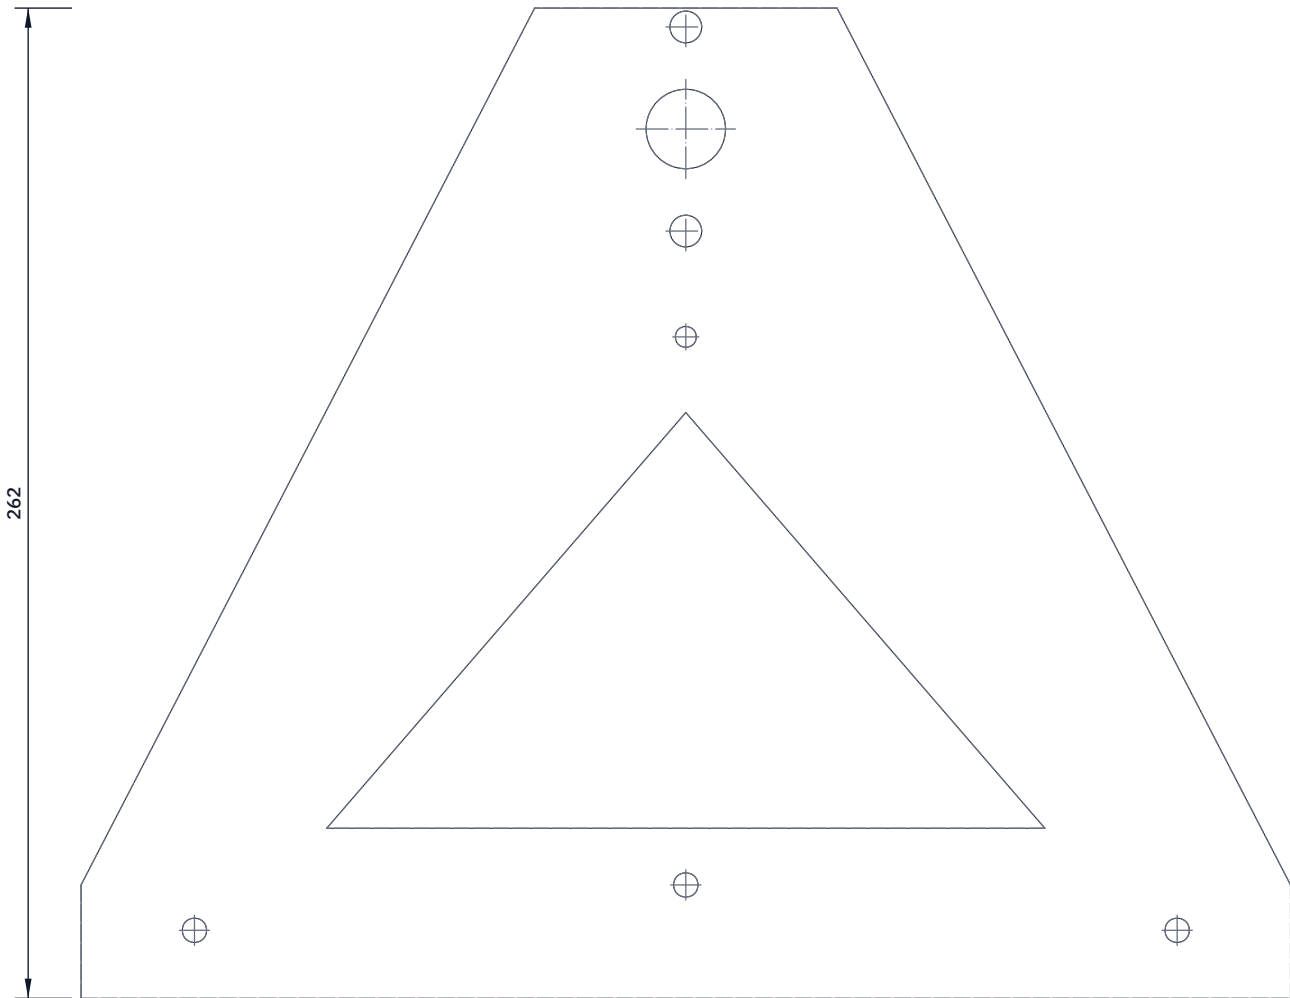

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

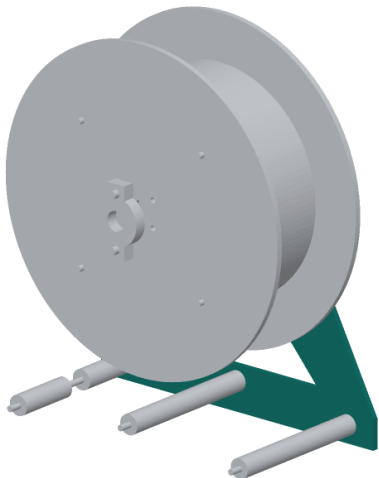

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two from 6 mm plate (jigsaw with a metal blade, or waterjet):
base 320 mm, 30 mm upright at each end, sloping sides up to a top 80 mm wide, 262 mm above the base.
Window: triangle 190 mm wide at 45 mm up, apex 155 mm up.
Axle hole 21 mm, 230 mm up on the centre line.
Bearing bolt holes 8.4 mm, 27 mm above and below the axle hole.
Spacer rod holes 6.4 mm: 130 mm each side of centre, 18 up; and on the centre line 30 up.
Right frame only: 5.5 mm hole 175 mm up for the slip ring anchor.
Left frame only: M8 tapped hole 100 mm forward of and 100 mm below the axle, for the brake.
Also cut three spacer tubes 20 x 2 mm, 152 mm long; cut one of them into two 63.5 mm halves for the front foot (the counter bar sits between them). Check: both frames stand square on a flat bench.

CULVERTCRAWL				github.com/BoujeeEnjinia1701/culvertcrawl			
CulvertCrawl reel side frame (make 2): making sketch							
DRAWING NO. CVC-DWG-112			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2		UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 6061 aluminium plate 6 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	