



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

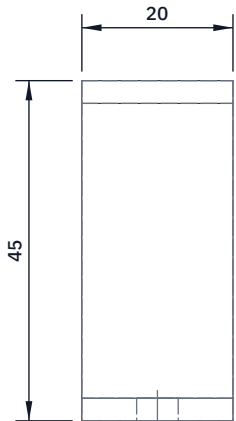

TOP VIEW

Scale 1:1; looking down (along -Z)

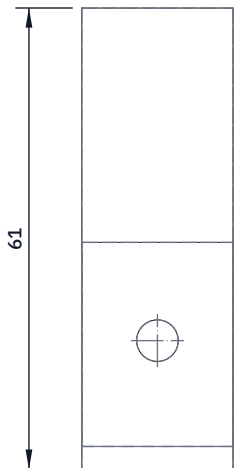


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

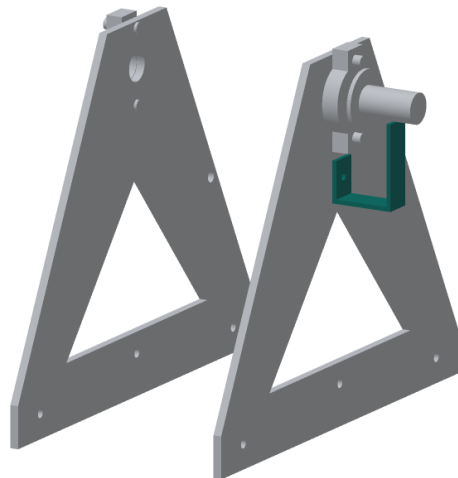

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bend 20 x 3 mm flat bar into a Z: a 30 mm foot, a 45 mm run outward and a 58 mm upright (sizes from the drawing).

Foot: one 5.5 mm hole 17 mm above its bottom end.

Upright: file a slot at its top to take the slip ring's anti-rotation tab (or tie the stator lead to it).

Fit: foot flat on the outside of the right frame, one M5 bolt; the upright touches the underside of the slip ring body.

It stops the stator turning; it must not clamp it tight.

Check: the reel turns a full turn and the stator stays still.

CULVERTCRAWL

github.com/BoujeeEnjinia1701/culvertcrawl

CulvertCrawl slip ring anchor bracket: making sketch

DRAWING NO. CVC-DWG-116			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 20 x 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand