



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from parametric model (CVC-CAL-001)	2026-09-25	AC
P2	Ring plane 300; ballast 230 x 80 x 14 (CVC-DDR-002)	2026-09-25	AC

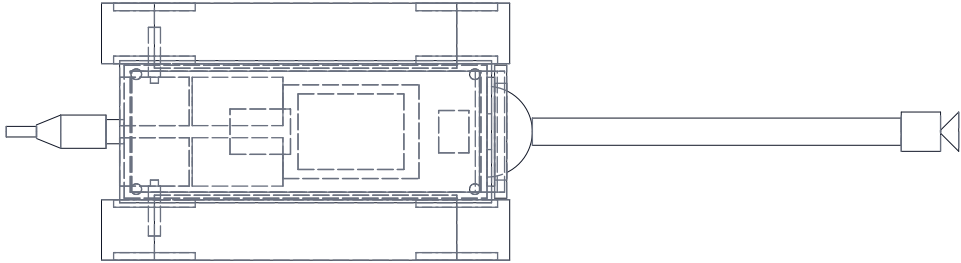


TOP VIEW
Scale 1:5

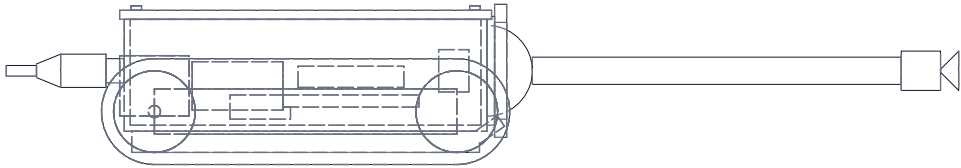


FRONT VIEW
Scale 1:5

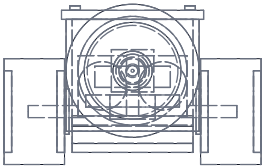

RIGHT VIEW
Scale 1:5



FIT, 300 MM
Scale 1:10

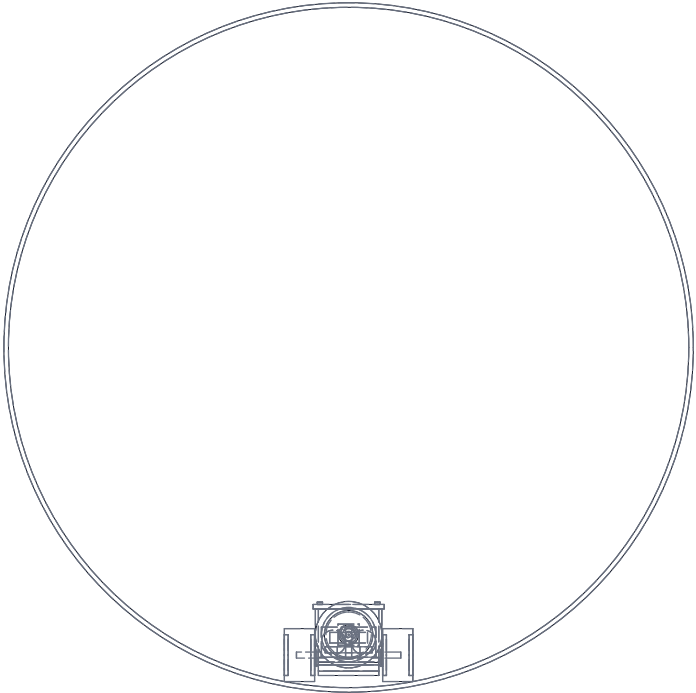

FIT, 900 MM
Scale 1:10

KEY DIMENSIONS AND FIGURES (MM UNLESS NOTED)

Width over tracks 170; height over lid screws 106
Length 610, rear strain relief to cone mirror (track length 270)
Track centers 130 apart; belts 40 wide; sprockets R35 at 200
Hull 240 x 88 x 74, 4 wall; lid 6 with O-ring
Camera axis 62 above track contact line; dome R30
Laser ring plane 300 ahead of the dome center
Ballast 230 x 80 x 14 steel, 8 above contact line
Tether gland on the rear face, on the camera axis
Mass 5.8 kg; 3.05 kg net when submerged (CVC-CAL-001 v0.2)
Clearance to wall 50 or more in 300 to 900 mm pipe
PRELIMINARY, NOT FOR FABRICATION

CULVERTCRAWL

General arrangement, crawler

DRAWING NO. CVC-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Hull 6061 Al; ballast steel; tracks rubber on Al plates. See bom/bom.csv. PRELIMINARY					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand