



CONCEPT, NOT FOR FABRICATION
PRELIMINARY, NOT FOR FABRICATION

CurbCount · github.com/BoujeeEnjinia1701/curbcount

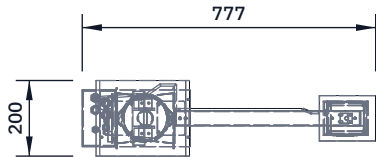

TOP VIEW

Scale 1:20; looking down (along -Z)

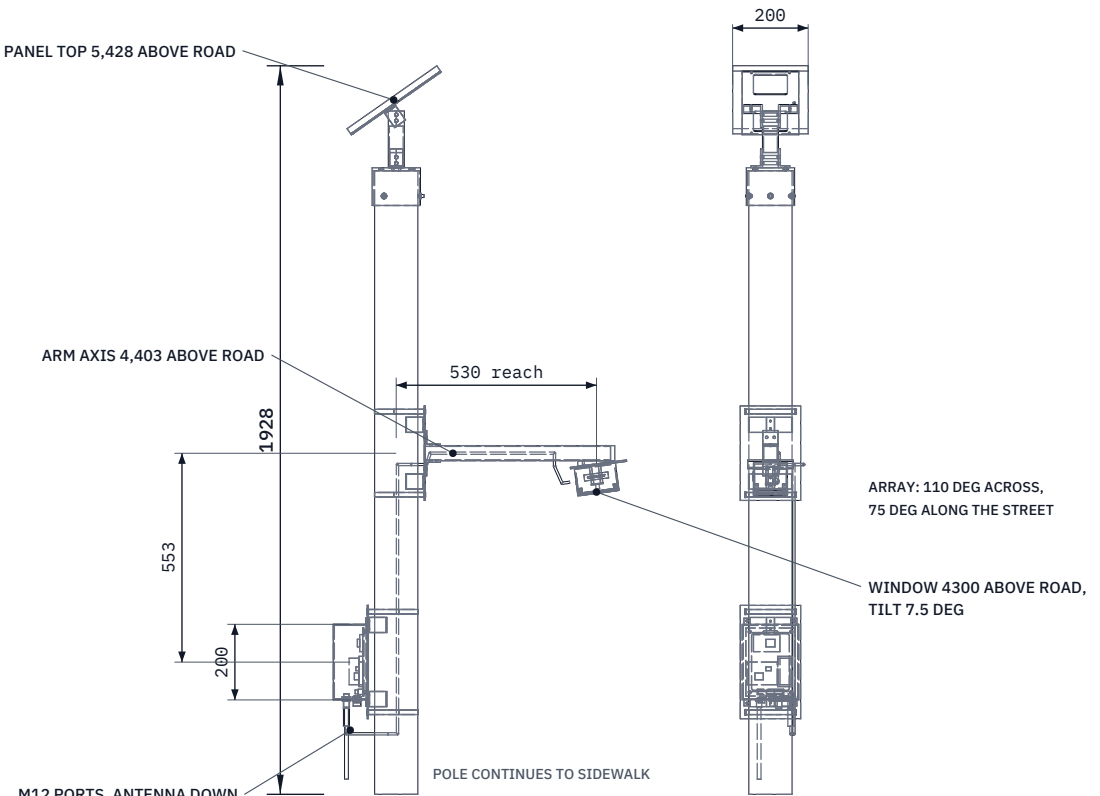


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

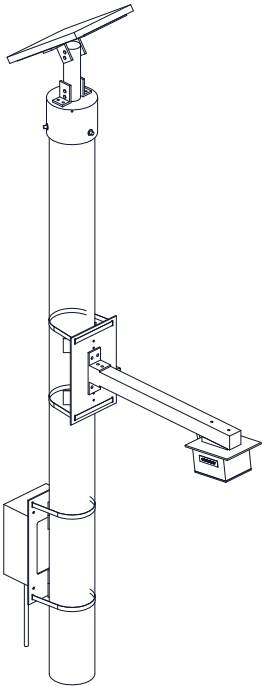

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Pole 114.3 OD, 450 behind the curb (site supplied, not in BOM)
- Head 110 x 90 x 70, window 4300 above road, tilt 7.5 deg
- Arm 40 x 40 x 2 Al, 498 long; reach 530 from pole axis
- FieldNode enclosure 150 x 90 x 200, center 3850
- Panel 6 W (FieldNode) 290 x 200, tilt 35 deg on a 100 sleeve
- Saddle plates on bent V-saddles; four 12 mm bands through slots; no drilling
- M12 5-pin cable, enclosure port to head (FieldNode pinout)
- Footprint -4.4 to 8.3 m across the street (CBC-CAL-001)
- Notice plate 150 x 200 at 2600 (not drawn); lanyards on panel and head

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

General arrangement

DRAWING NO.

CBC-DWG-001

REV

P5

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium mounts, ASA head; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION