



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

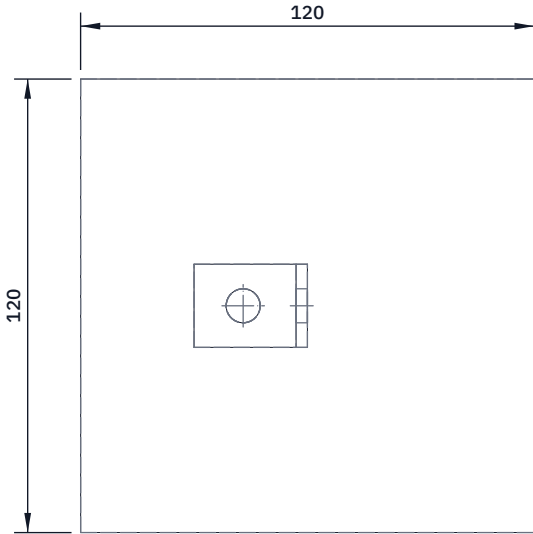


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)

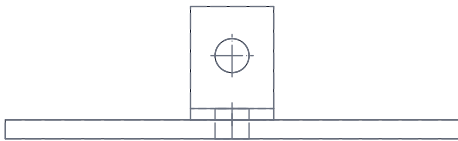

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

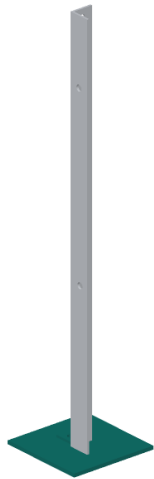

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Foot plate 120 x 120 x 5 mm, corners rounded. One 9 mm hole 17 from the plate centre toward the box side, countersunk from below so the bolt head sits flush and the plate lies flat on the ground.

Cleat: 22 mm length of 30 x 30 x 3 angle. 9 mm holes: upright leg 17 above its lower face; lying leg 17 from the corner; both centred.

Fit: the cleat's lying leg bolts to the plate with a countersunk M8 bolt from below; its upright leg sits inside the leg's face leg and bolts to it, 17 above the plate.

Paint or galvanize the plate after drilling.

Check: the leg stands square on the plate.

DEWDRIIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive foot plate and cleat (make 4): making sketch

DRAWING NO. DWD-DWG-120			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 5 mm; galvanized angle 30 x 30 x 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand