


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Socket holes over the anchors in the top flange	2026-10-02	AC




TOP VIEW
Scale 1:10; looking down (along -Z)

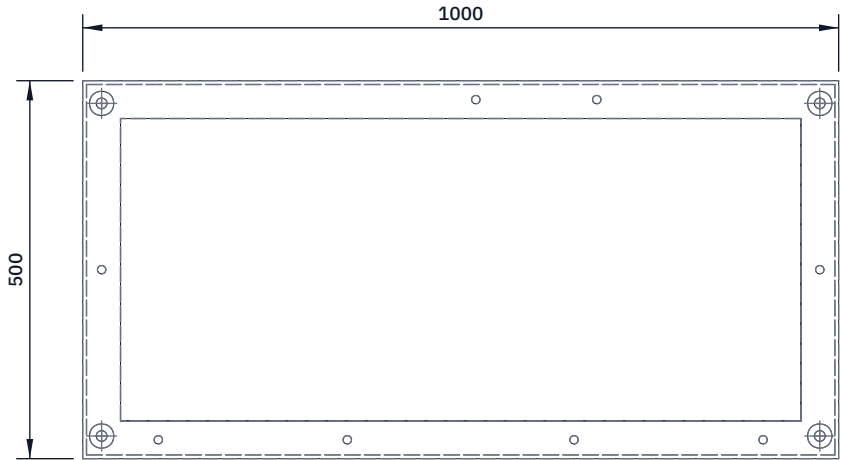

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

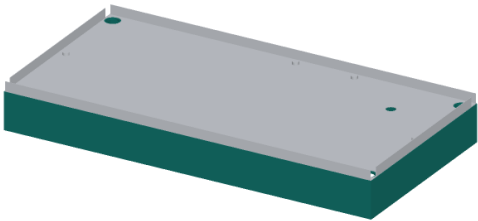

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Four lengths of 100 x 50 x 5 channel: two 1,000 and two 500 mm long outside, ends mitred at 45 degrees, flanges pointing inward.

Weld the corners all round on a flat table; check the diagonals are equal within 2 mm and the top is flat within 1 mm.

Bottom flange: four 14 mm anchor holes, 25 mm in from each end and 30 mm in from the front and back edges. Top flange: a 32 mm socket hole straight above each one, so a socket reaches the nut.

Top flange: eight 11 mm holes for the M10 floor bolts: front, 25 mm in, at 100, 350, 650 and 900 from the left end; back, 25 mm in, at 520 and 680 from the left end; one each end, centred, 25 mm in.

Grind the welds flush on the top face; paint or galvanize.

Fit: the floor pan sits flat on the top flange; the walls stand on its edge. Anchors go into the pad at the site, not in the workshop.

Check: top flat, holes match the floor pan held over it.

DOCKHUB

github.com/BoujeeEnjinia1701/dockhub

DockHub plinth: making sketch

DRAWING NO. DKH-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel channel 100 x 50 x 5 mm (C100), painted or galvanized					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	