REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

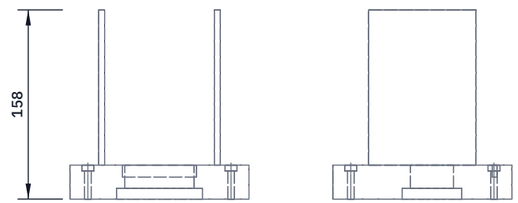

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

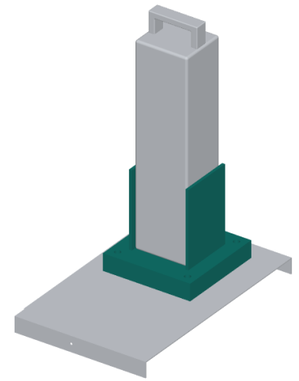

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print one piece: a base 150 x 150 x 28.5 mm with two side guides
5 x 90 x 130 mm on top, 46 to 51 mm each side of the centre.
Plug well, open on top: 58 x 36 x 19.5 mm deep, centred 8 mm
behind the cradle centre (toward the plenum).
Receptacle pocket, open underneath: 72 x 50 x 9 mm, same centre.
Catch slot: 62 x 4 x 10 mm deep, 58.5 to 62.5 mm behind the centre.
Four 5.5 mm holes 60 mm each side of the centre, front and back.
Two heat-set M3 inserts from below for the receptacle flange.
Fit: the receptacle screws in from below, then the cradle stands on
the liner floor on four M5 screws through liner and deck, nuts
under the deck. The pack's plug drops into the well.
Check: a pack dummy 90 x 80 mm slides between the guides freely.

DOCKHUB github.com/BoujeeEnjinia1701/dockhub

DockHub cradle with guides (print 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
DKH-DWG-109	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Flame-retardant filament, UL 94 V-0, 100 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand