REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

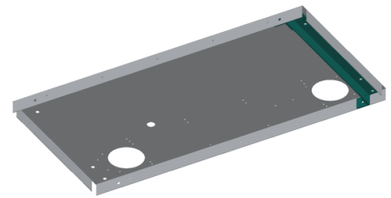

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Beam: 494 mm of 40 x 40 x 4 angle, ends touching the roof flanges.
Horizontal leg: four 11 mm holes 20 mm from the heel, 12 and
82 mm from each end.
Cleats: four 36 mm lengths of the same angle per cabinet.
One leg bolts to the beam's upright leg with two M8 bolts;
the other carries two welded M8 nuts, 20 mm apart, for the bolts
that come through the front (or back) panel and roof flange.
Drill the beam's upright leg and the cleat together (9 mm).
Fit: the horizontal leg lies flat under the roof plate on the post
line, 460 mm each side of the centre, heel on the inner side;
the post bolts pass through roof and beam, nuts under the beam.
The cleats bear on the roof's front and back flanges.
Check: the four bolt holes line up with the roof's post holes.

DOCKHUB github.com/BoujeeEnjinia1701/dockhub

DockHub roof beam with cleats (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
DKH-DWG-113	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Steel angle 40 x 40 x 4 mm, painted

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand