



CONCEPT, NOT FOR FABRICATION

EarthPress · [github.com/BoujeeEnjinia1701/earthpress](https://github.com/BoujeeEnjinia1701/earthpress)

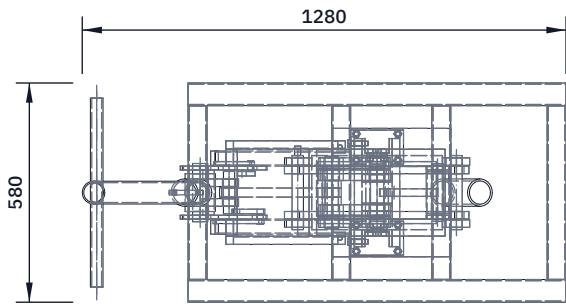


TOP VIEW

Scale 1:20; looking down (along -Z)

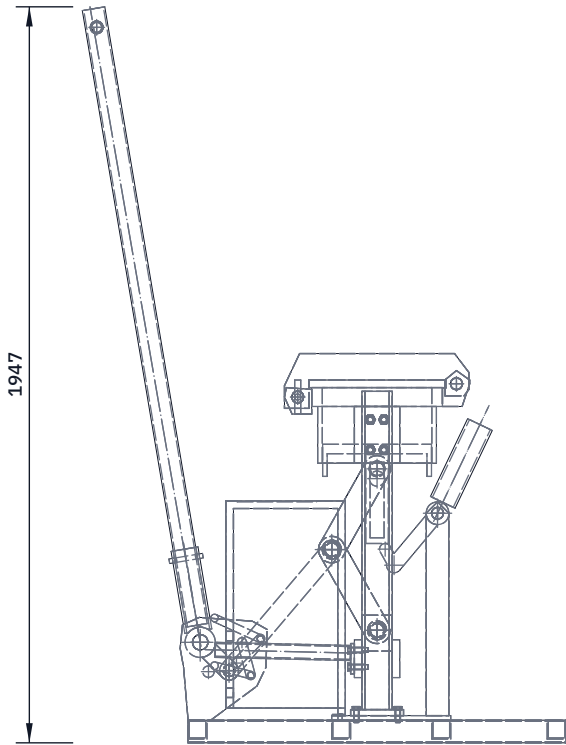


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

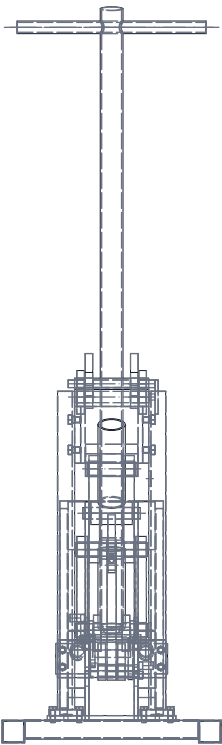

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

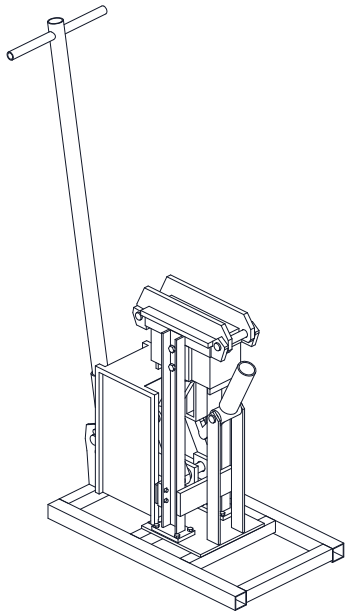

ISOMETRIC VIEW

Not to scale; seen from the front right and above

KEY DIMENSIONS AND INTERFACES (MM)

- Shown at start of stroke, lid closed, lever on its catch
- Cavity 290 x 140, rim at 940; fill 150, block 90
- Mold wall 12, belt 16 x 50; 8 x M16 into tapped flanges
- UPN 80 columns, webs toward the mold; pin access holes
- Lid 20 plate + 2 ribs 20 x 70; pins 30 in rib ears
- Toggle links 245 c/c, 28 x 70, round ends; pins 35
- Base pin at 298; stop at 6 deg from vertical
- Lever pivot (-468, 266); crank 107; link 420
- Lever 2 in sch 40, grip radius 1650; arc 59 deg
- Eject seesaw at (160, 608), arm 160, lift 160
- Rest catch and end pawl on the crank pin; guard
- Ratio 173:1 at the stop; 81 kN at 2 MPa
- Mass about 200 kg; heaviest piece 45 kg
- PRELIMINARY, NOT FOR FABRICATION

EARTHPRESS

[github.com/BoujeeEnjinia1701/earthpress](https://github.com/BoujeeEnjinia1701/earthpress)

Manual CSEB press: general arrangement

DRAWING NO.

EPR-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Mild steel plate, UPN 80, tube and 2 in pipe; C45 pins. See bom/bom.csv