



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

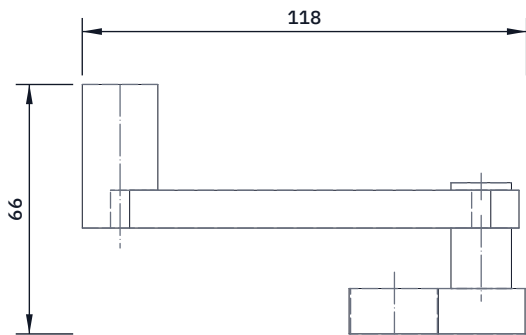


TOP VIEW

Scale 1:2; looking down (along -Z)

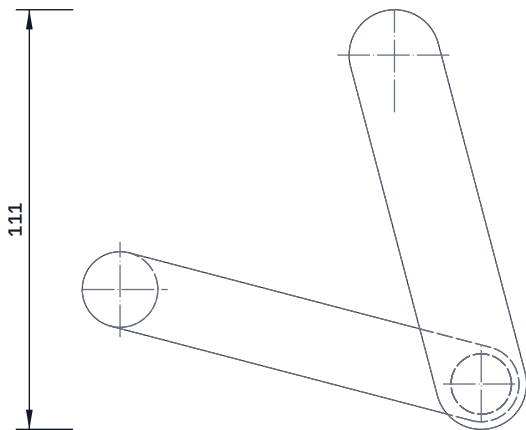


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

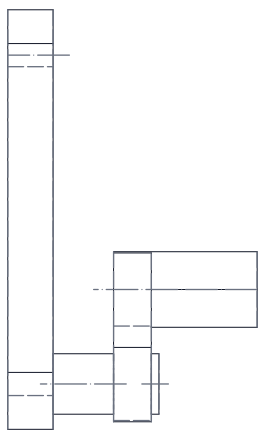

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

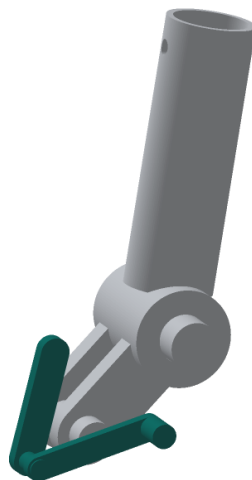

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one pawl (+Y side) and one catch (-Y side), mirror images.

Shaft: 16 bright bar, 40 long.

Pawl plate: 12 mm, 24 wide, 90 between the shaft and the tip centre, round ends of 12 radius; weld on the shaft's inner end.

Handle: 10 mm plate 20 wide, from the shaft out to a 20 knob, welded on the shaft's outer end, outside the bracket plate.

Fit: shaft through the 16.5 hole in the bracket plate, washer and circlip; a torsion spring holds the tip against the crank pin.

Pawl: its tip drops in under the crank pin at the end of the stroke and takes the kickback end on, along its length.

Catch: its tip drops in above the crank pin at the start and stops the lever falling into the stroke.

Check: each snaps in by its spring and lifts out by the handle.

EARTHPRESS

github.com/BoujeeEnjinia1701/earthpress

EarthPress end pawl and rest catch (one of each, mirror pair): making sketch

DRAWING NO. EPR-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Plate 12 and 10 mm; 16 mm bright round bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	