


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

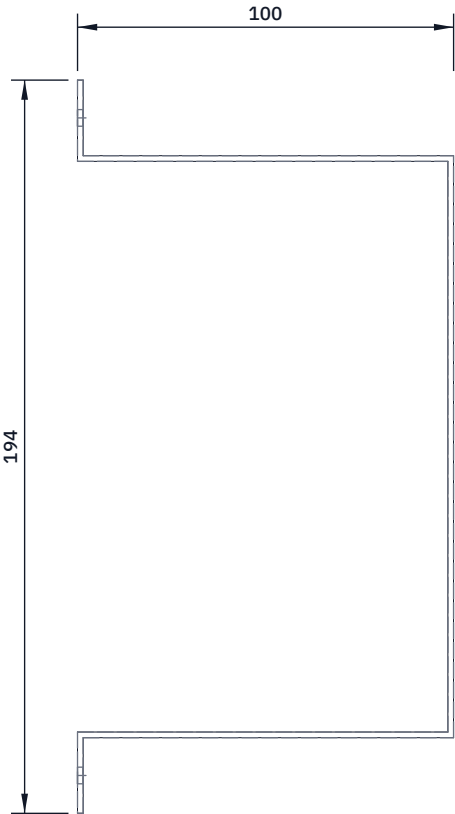


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

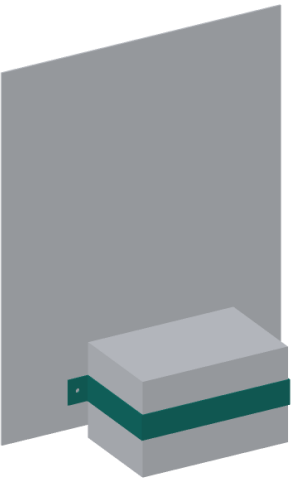

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 25 mm wide strip about 395 mm long.

Mark the battery's front width (151 mm) in the middle and its depth (98 mm) each side of that, then a 20 mm foot on each end.

Fold 90 degrees at each mark so the strap fits round the battery's front and sides and the feet turn outward against the gear plate.

Drill one 4.5 mm hole in the middle of each foot.

Line the inside with 2 mm closed-cell foam tape.

Fit: the battery stands on the box floor against the gear plate; the strap goes round it 50 mm above the floor; M4 screws and nyloc nuts through the gear plate.

Check: the battery cannot move when you push it.

EmberGuard battery strap: making sketch

DRAWING NO. EGD-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium strip 25 x 1.5 mm, 1050 or 5052					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	