


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

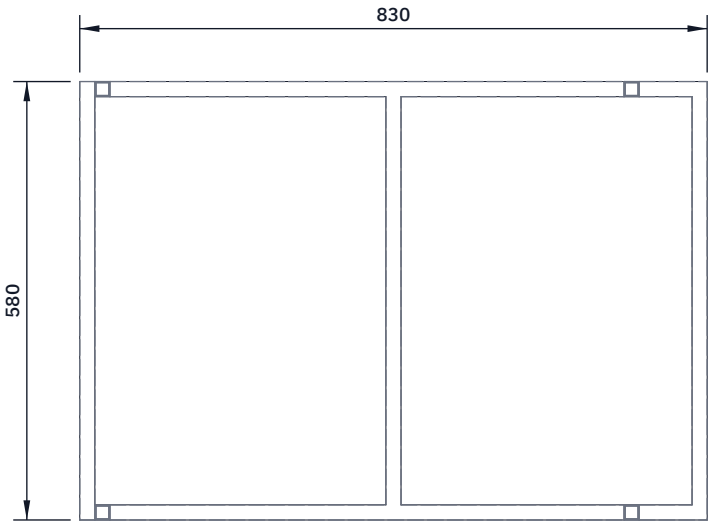


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

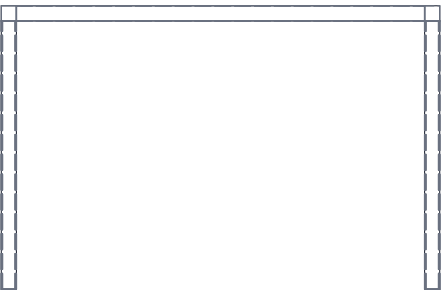

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

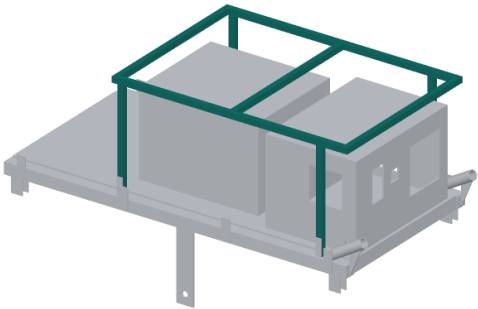

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Frame: two 830 mm long sides, three 540 mm cross tubes (ends and middle), 20 x 20 x 1.5 mm; corner cleats and rivets. 830 x 580 mm.

Fabric: reflective aluminized fabric, 830 x 580 mm, eyelets every 100 mm, laced round the frame, shiny side up.

Uprights: four 355 mm lengths of the same tube. 6.5 mm hole across each, 30 mm from the bottom, for the M6 bolt into the frame tab.

Uprights stand on the rail tops at 400 and 1,100 mm from the front end, 280 mm each side of the centre line.

The frame's long sides rest on the upright tops 810 mm above the ground, 50 mm over both boxes; an angle clip and M6 wing bolt at each upright.

Undo four wing bolts to lift the shade off and open the battery lid.

Check: 50 mm air gap over both boxes; shade level within 5 mm.

FIELDCELL

github.com/BoujeeEnjinia1701/fieldcell

FieldCell sun shade frame and uprights: making sketch

DRAWING NO. FCL-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium square tube 20 x 20 x 1.5 mm; aluminized fabric					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand