
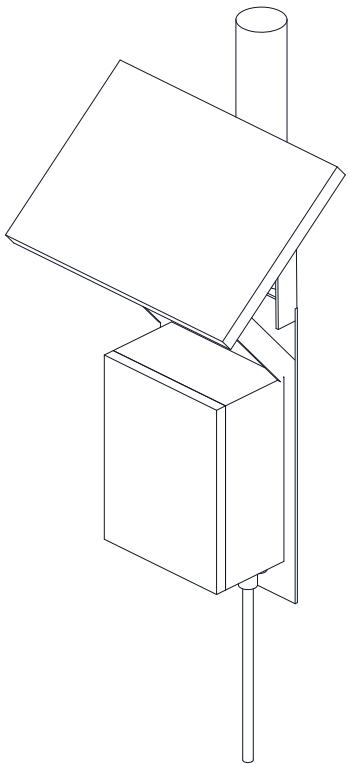


CONCEPT, NOT FOR FABRICATION
PRELIMINARY, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

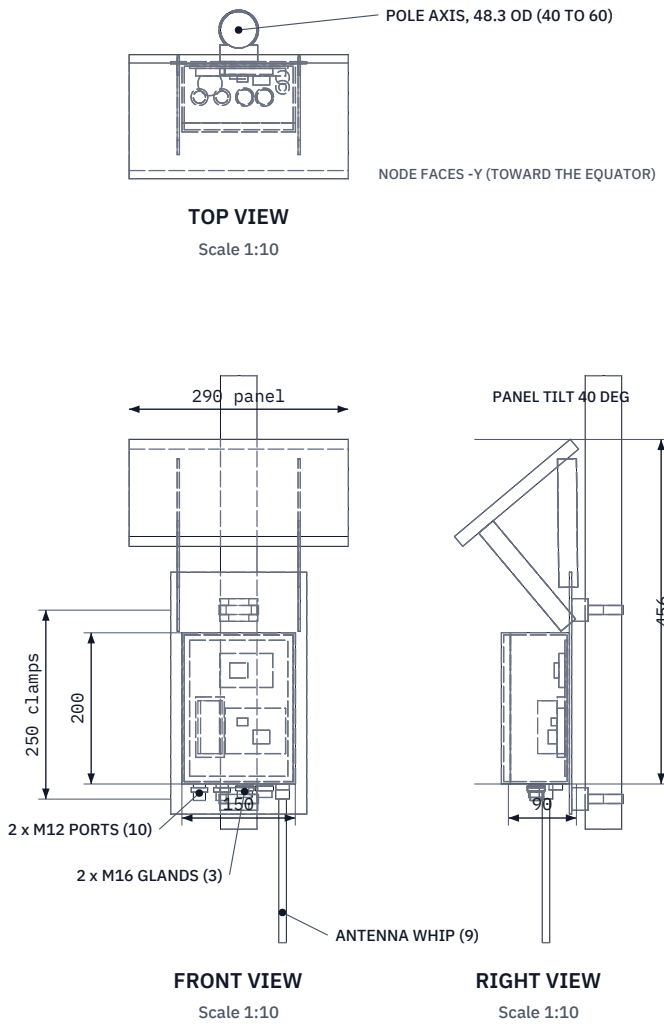

ISOMETRIC VIEW

Not to scale; grey pole stub is site supplied

MAIN DIMENSIONS AND INTERFACES (MM)

Enclosure IP65 150 x 90 x 200 (W x D x H); base 1,750 above ground
Panel 6 W, 290 x 200, tilt 40 deg; top 2,206 above ground
Panel overhangs lid by 57; front edge 121 above enclosure
Back plate 180 x 320 x 3 Al; V-blocks 50 wide
Band clamps 12 wide, 250 apart; poles 40 to 60 OD
Bracket flat bar 25 x 3; posts 170, struts 171
Bottom face: 2 x M12 ports, 2 x M16 glands, antenna bulkhead, vent
Whip 190 long; tip 1,540 above ground
Third-angle; front view from -Y; pole on the Z axis
Numbers in brackets are BOM lines; loads in FND-CAL-001

FIELDNODE

General arrangement

DRAWING NO. FND-DWG-001		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Bought-in parts per bom/bom.csv; aluminium bracket and plate. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand	