


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

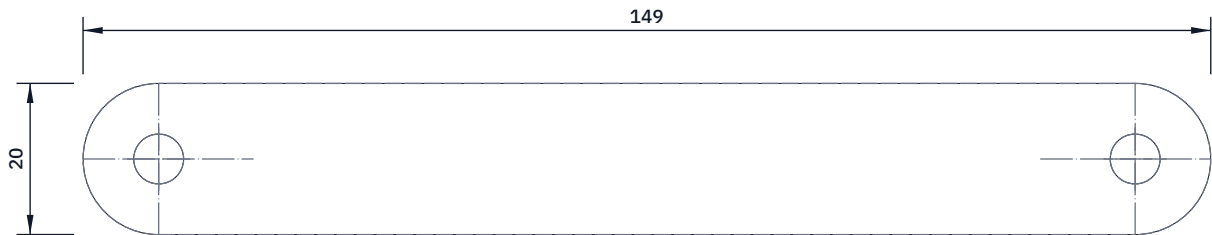


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

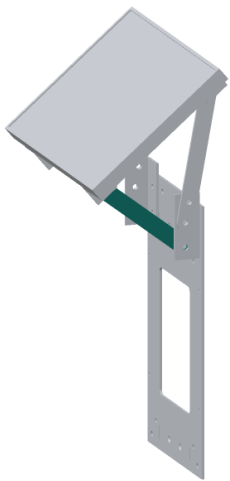

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 149 mm lengths of 20 x 3 mm flat bar.
Round both ends to a 10 mm radius.
Drill 6.6 mm, 10 mm from each end: 129.2 mm between centres.
This length sets the panel tilt of 40 degrees.
Drill the two struts clamped together so the holes match.
Fit: the lower end bolts to the inside of the plate clip, the upper end to the inside of the low panel clip; one M6 bolt each end.
The strut rises at 38 degrees and passes 10 mm above the sun shield.
Check: hole centres 129.2 mm apart, within 0.5 mm; a shorter strut tips the panel steeper, a longer one flatter.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode strut (make 2): making sketch

DRAWING NO. FND-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 20 x 3 mm, 6063 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	