



| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-30 | AC |




TOP VIEW

Scale 1:10; looking down (along -Z)

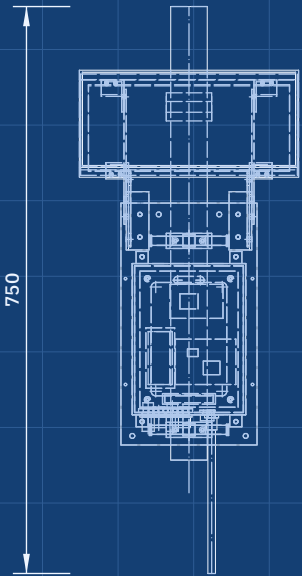


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

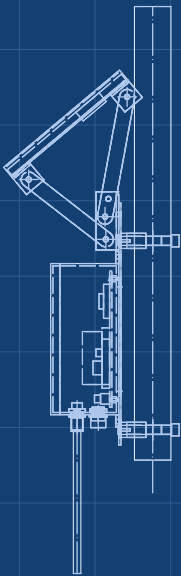

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

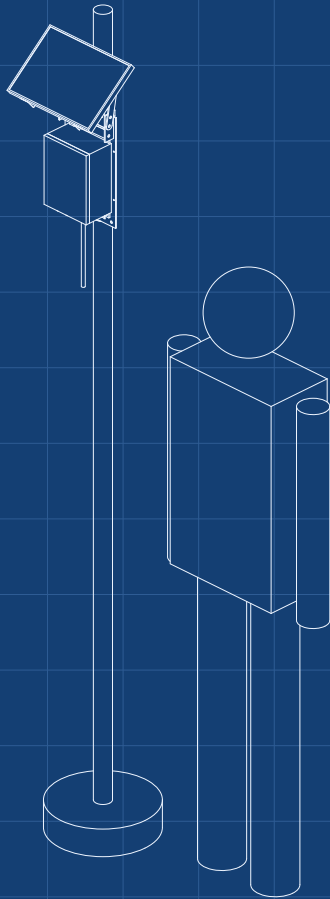

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Enclosure 150 x 90 x 200 mm, IP65; 6 W, 9 V class panel as rain hood  
LiFePO4 cell 3.2 V, 6 Ah, about 19 Wh; charging 0 to 45 °C only  
Worst month: 7.75 Wh/day stored against 2.67 Wh/day drawn  
Published sensor allowance 100 mW; 5.75 days with no sun  
LoRaWAN every 15 min at SF9; \$139, 2.45 kg; shield option above 30 °C

FIELDNODE

[github.com/BoujeeEnjinia1701/fieldnode](https://github.com/BoujeeEnjinia1701/fieldnode)

Pole-mounted solar sensor node concept

DRAWING NO.

FND-DWG-010

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-09-30

DRAWN

Amish Chadha

MATERIAL / NOTES

Massing model for concept communication