
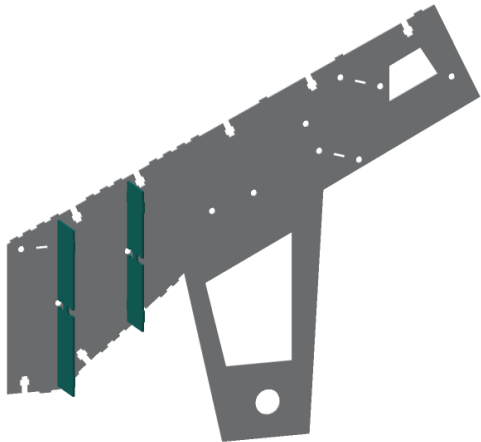
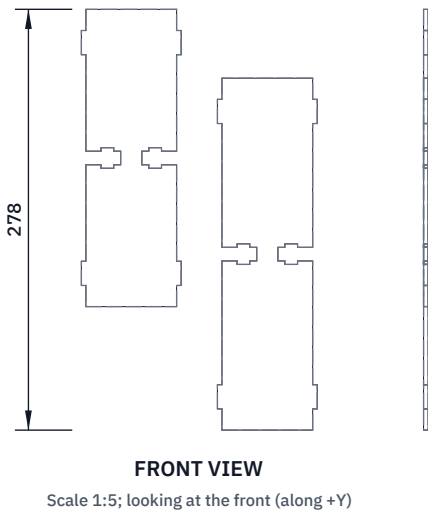


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two ribs, both 60 mm wide plus a tab each side: rib A (at 800 mm from the rear axle, left in the sketch) 197 mm tall, rib B (at 900 mm) 233 mm tall.

Each long edge: two tabs into the side plate slots and one T-slot between them for an M8 bolt from outside the spine.

T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.

Fit: the ribs stand square across the spine, 5 mm clear of both covers.

Mark each rib A or B with a paint pen; they are not interchangeable.

Check: the rib sits square in the side plate slots.

FLATTRIKE				github.com/BoujeeEnjinia1701/flattrike			
FlatTrike spine ribs (make 1 of each): making sketch							
DRAWING NO. FTK-DWG-104			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	