
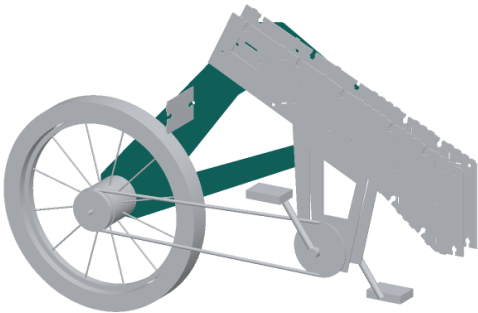


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

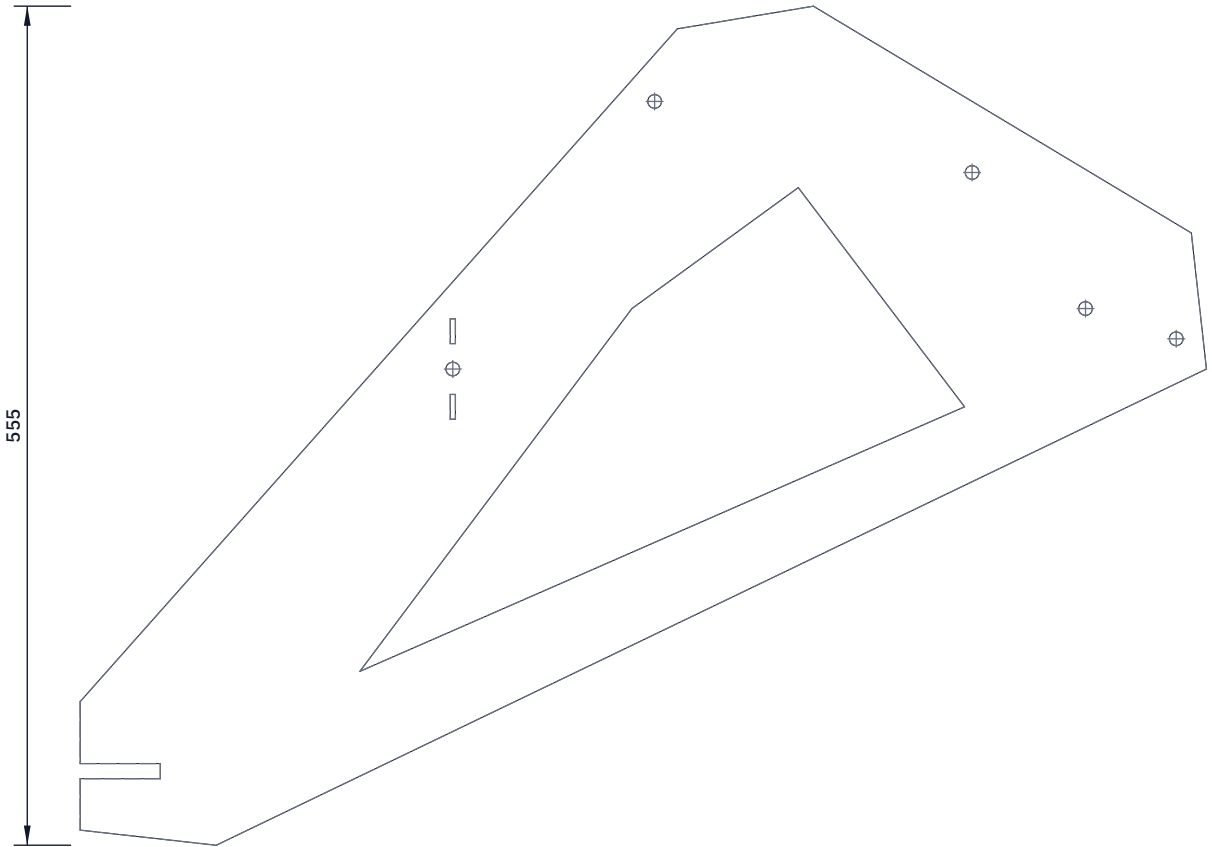

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2. The right plate is the left plate turned over.
Outline about 745 x 555 mm with one window.
Rear dropout: an open slot 10 mm wide and 53 mm long cut into the rear edge, 254 mm up; the hub axle slides in from behind.
Four 9 mm holes for the stay-to-spine bolts; a slot pair and a 9 mm hole for the stay bridge (inside face).
Fit: the plates stand 120 mm apart (the hub's width over locknuts), 27 mm outside the spine, held by four through-bolts.
Check: a 10 mm bar slides the full length of the dropout slot.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike rear stay plate (make 2, left and right): making sketch

DRAWING NO. FTK-DWG-108		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	