


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

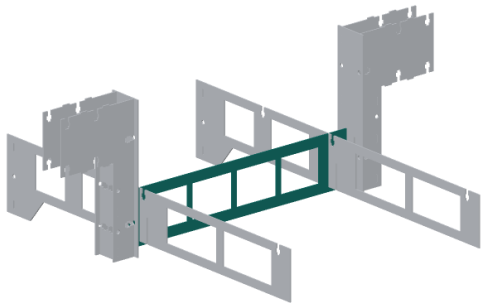

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2, identical. Plate 566 x 120 mm with four windows.

Two halving slots 3.4 mm wide down from the top edge, 55 mm deep, 238.5 mm each side of the centre line: the rails drop into them.

Each end: two tabs and a T-slot into the knuckle post's inner cheek.

T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.

Fit: the two plates cross the bed 25 mm apart under the box floor and carry the front wheels' load from one knuckle post to the other.

Check: with both rails in the slots the top edges are level.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike axle beam plate (make 2): making sketch

DRAWING NO. FTK-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand