


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

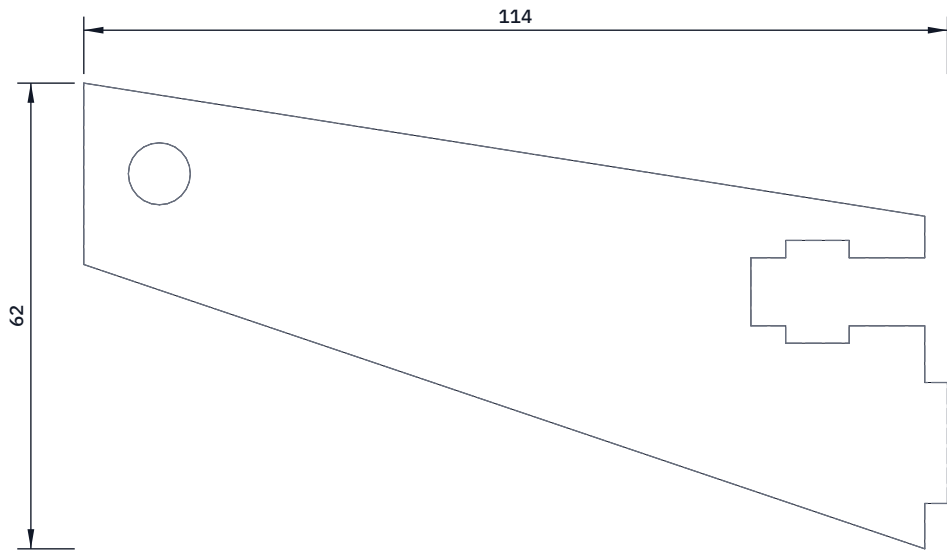

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

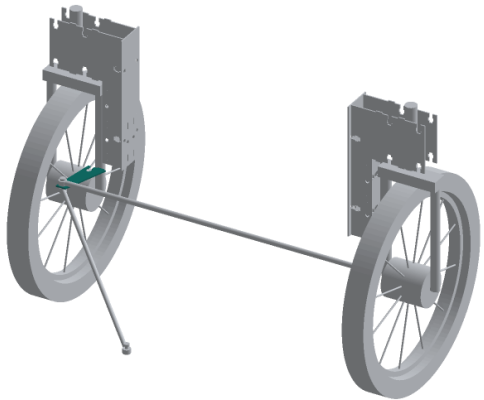

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2; the right arm is the left arm turned over.
Tapered plate 114 mm long, 44 mm wide at the clamp end.
Clamp end: one tab and one T-slot into the clamp plate.
Tip: 8.2 mm hole for the rod end bolt, 120 mm from the kingpin axis, on the line from the kingpin to the middle of the rear axle (this is what gives the Ackermann steering).
T-slot: 9 mm wide, 23 deep, with a 13.6 x 8.4 mm window 10 mm in for the nut.
Fit: the arm points back and slightly in from the inboard fork leg, below the knuckle post; it turns with the wheel.
Check: on the fork, the hole is 120 mm from the steering axis (the wheel's centre line), give or take 1 mm.

FLATTRIKE

github.com/BoujeeEnjinia1701/flattrike

FlatTrike steering arm (make 2, left and right): making sketch

DRAWING NO. FTK-DWG-118			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 3 mm S235JR or A36 steel plate, laser or waterjet cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	