



| REV | DESCRIPTION   | DATE       | BY |
|-----|---------------|------------|----|
| P1  | Concept sheet | 2026-09-30 | AC |

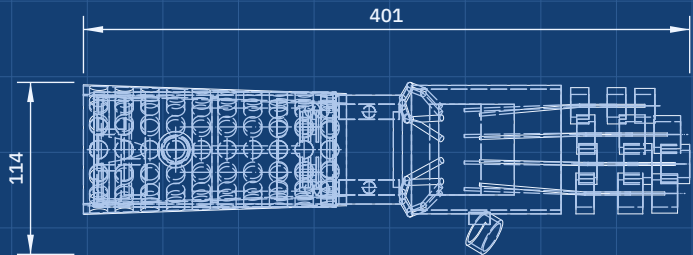


TOP VIEW

Scale 1:5; looking down (along -Z)

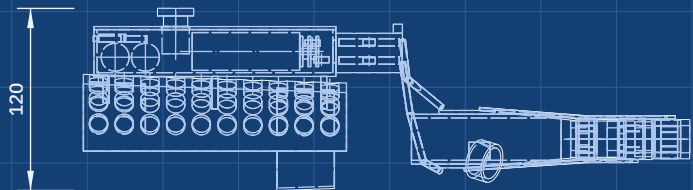


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

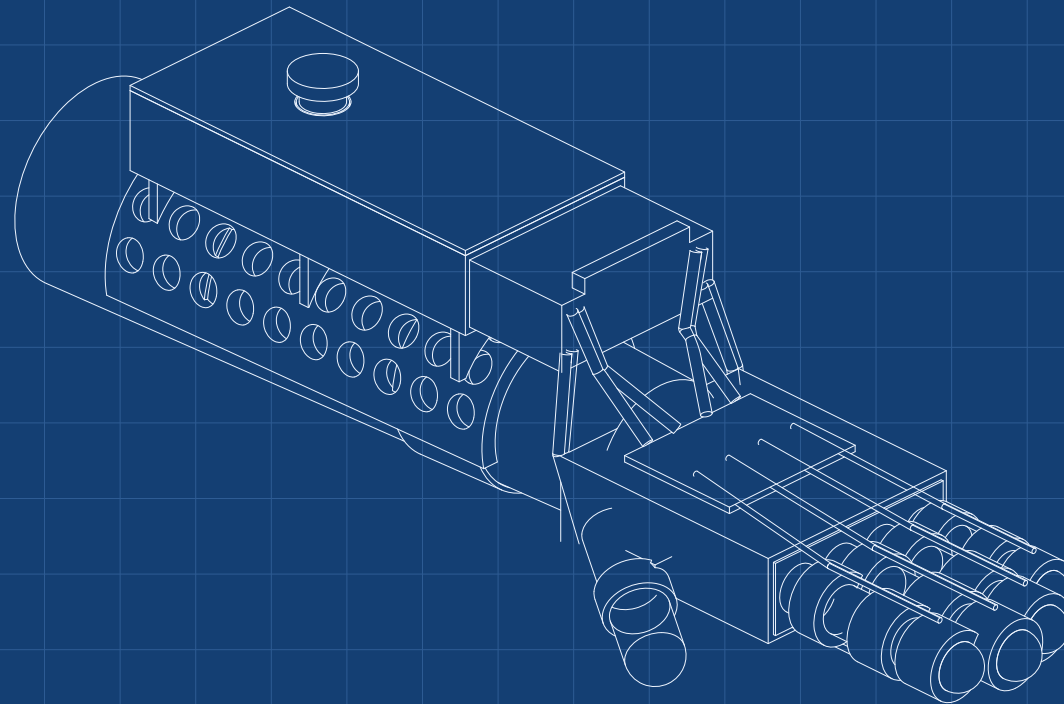

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

- 2 gearmotors drive 4 fingers; thumb held passively
- 30 N extensor tendon force per finger; 0.49 N m peak at the spool
- About 445 cycles per hour at design load (FXH-CAL-001)
- Balance pulleys: 40 N limit per finger; thimbles: 40 kPa worst
- About 3.8 sessions of 60 min per 18 Wh charge
- Pack about 639 g, hand parts about 115 g
- About \$290 in parts (BOM, indicative)

FLEXHAND

[github.com/BoujeeEnjinia1701/flexhand](https://github.com/BoujeeEnjinia1701/flexhand)

Tendon-driven finger exoskeleton concept

|                                   |                    |                                                                                                     |                           |                              |
|-----------------------------------|--------------------|-----------------------------------------------------------------------------------------------------|---------------------------|------------------------------|
| DRAWING NO.<br><b>FXH-DWG-010</b> |                    | REV<br><b>P1</b>                                                                                    | SHEET<br><b>1 of 1</b>    | SIZE<br><b>ANSI B</b>        |
| SCALE<br><b>1:5</b>               | UNITS<br><b>mm</b> | PROJECTION<br> | DATE<br><b>2026-09-30</b> | DRAWN<br><b>Amish Chadha</b> |

MATERIAL / NOTES  
Massing model for concept communication