




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

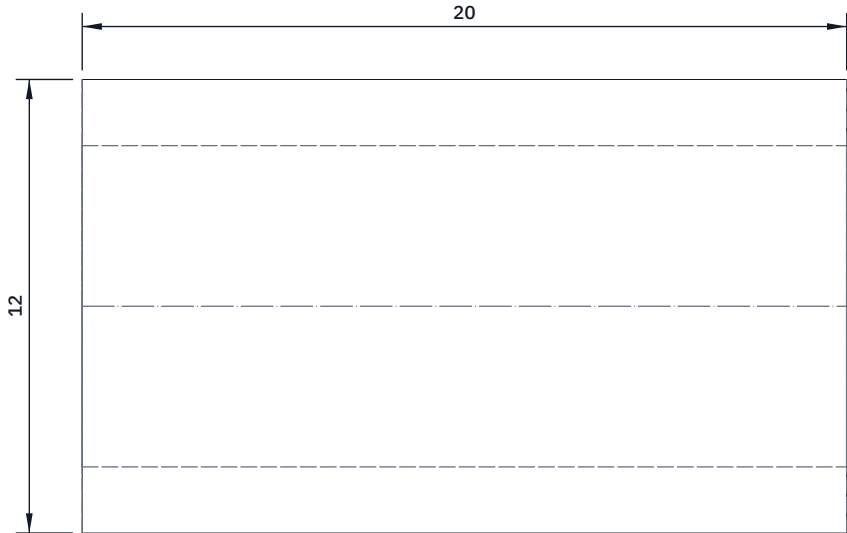


TOP VIEW
Scale 5:1; looking down (along -Z)

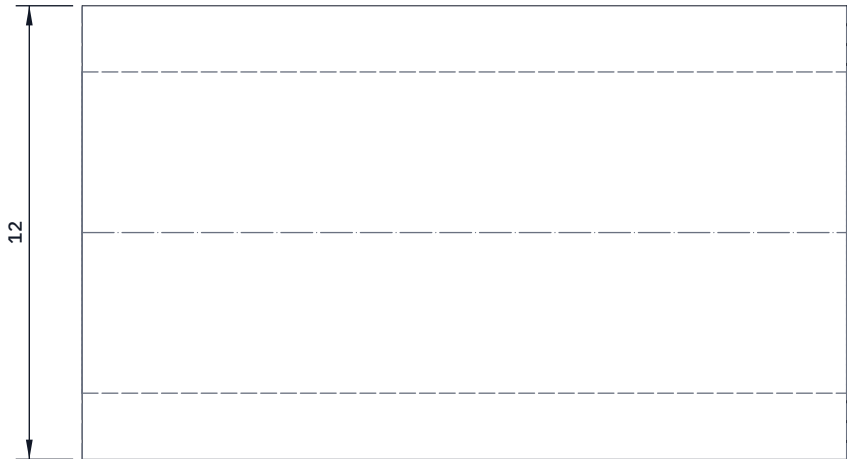

FRONT VIEW
Scale 5:1; looking at the front (along +Y)

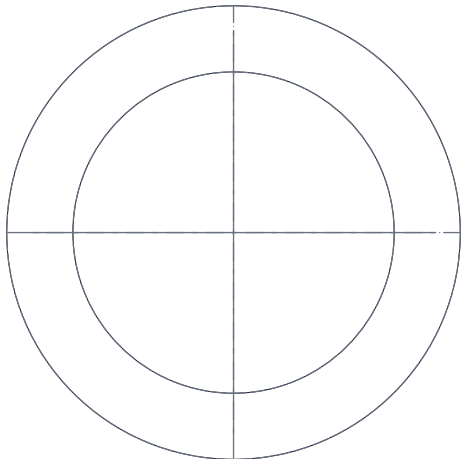

RIGHT VIEW
Scale 5:1; looking at the right side (along -X)

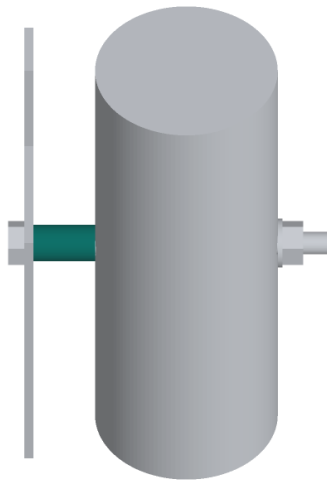

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 20.2 mm of 12 mm aluminium tube (8.5 mm bore, or drill the bore out to 8.5 mm). Face both ends square.

It fills the gap between the back of the bracket plate and the pole at the through-bolt, so tightening the bolt does not bend the plate.

File the pole end to a shallow curve if it rocks on the pole.

Fit: on the M8 through-bolt between the plate and the pole.

Check: length 20.2 mm, within 0.5 mm; on a 60 mm pole the plate stays flat when the bolt is tight.

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge through-bolt spacer: making sketch

DRAWING NO. FLG-DWG-109		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 5:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium tube 12 mm OD, 8.5 mm bore				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	