REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-24	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

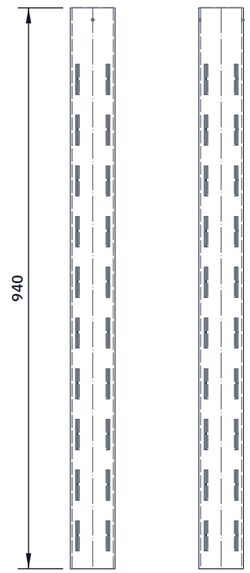

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

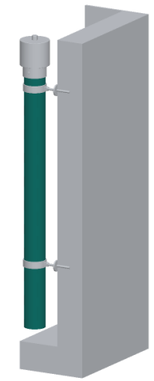

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 940 mm of 75 mm PVC pipe; square and deburr both ends.
Slots 5 x 50 mm: ten rows, four slots a row at 90 degrees apart. Row centres 55 mm from the bottom end, then every 85 mm.
Turn the slots 45 degrees off the line to the basin wall (where the clamp rods are). Cut with a hand saw and file, or a router.
Two 3.5 mm pilot holes 20 mm below the top end, one each side, for the screws that hold the drain head socket.
Mark the clamp positions: 80 and 710 mm below the top end.
Fit: hangs in the basin 90 mm from the curb-side wall on two stand-off pipe clamps; top end 300 mm below the road; the open bottom end 60 mm above the basin floor.
Check: a 50 mm ball dropped in falls straight out of the bottom.

FLOODGAUGE

github.com/BoujeeEnjinia1701/floodgauge

FloodGauge stilling tube: making sketch

DRAWING NO.	REV	SHEET	SIZE
FLG-DWG-112	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

PVC pressure or drain pipe 75 mm OD, 3 mm wall

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand