REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

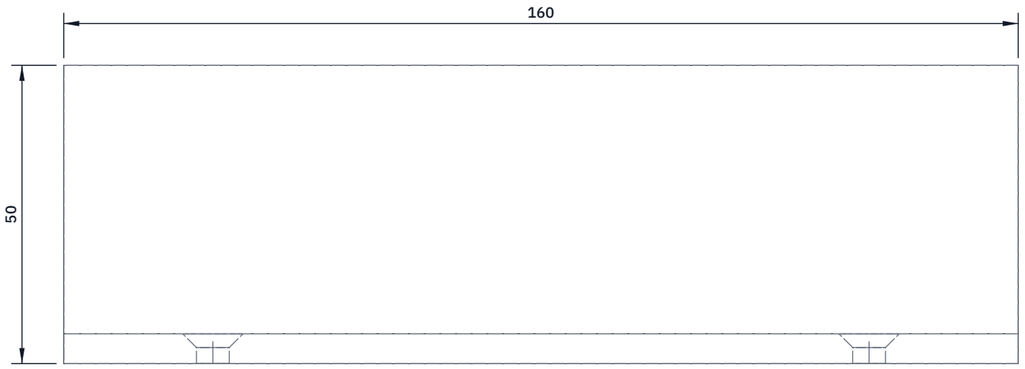

TOP VIEW

Scale 1:1; looking down (along -Z)

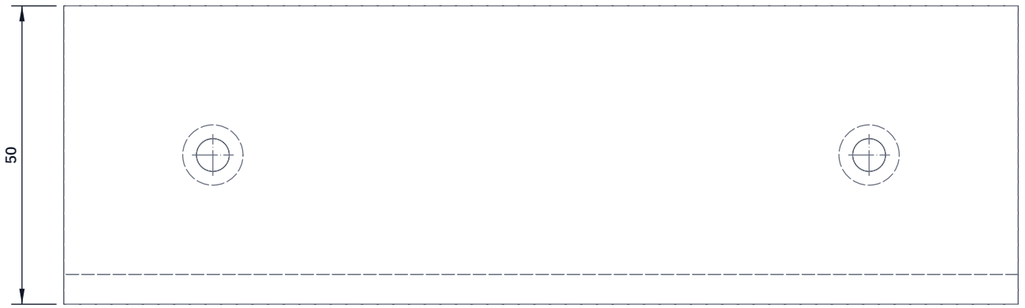

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

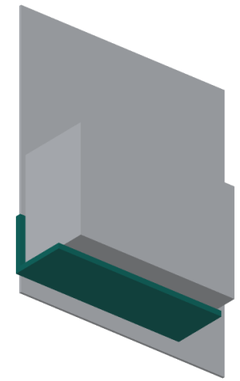

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut one 160 mm length of 50 x 50 x 5 angle; deburr.
Upright leg: two 5.5 mm holes 25 mm up from the corner, 25 mm from each end, countersunk 90 deg to 10 mm on the battery side.
Drill the box's inner mounting plate through them.
Fit: M5 countersunk screws from the battery side, nuts behind the inner plate, so the battery's back sits flat. The flat leg points out toward the lid, 26 mm above the box floor so the gland nuts below it stay clear. The shelf sits at the left of the box.
Cut two 27 x 4 mm slots in the inner plate, above and below the battery, 37 mm left of centre, for the battery strap.
The battery (151 x 65 x 98 mm, 2.2 kg) stands on the flat leg, its back against the upright leg; the strap goes over and under it.
Check: with the battery strapped, it does not move when the box is tipped.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard battery shelf: making sketch

DRAWING NO.	REV	SHEET	SIZE
GGD-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium equal angle 50 x 50 x 5 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand