



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

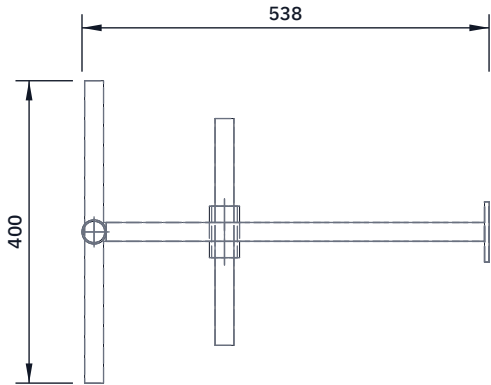


TOP VIEW

Scale 1:10; looking down (along -Z)

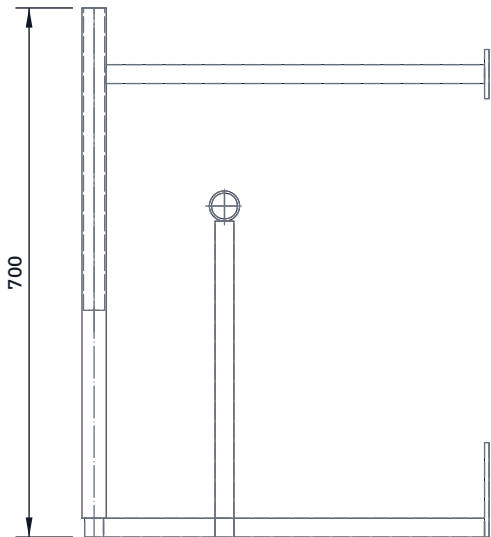


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

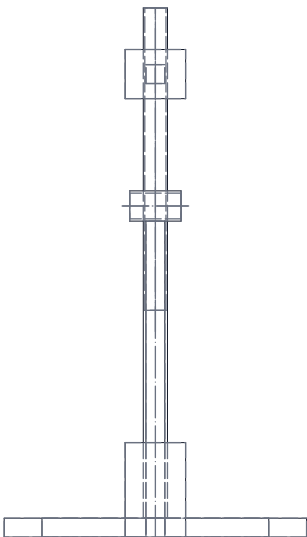

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

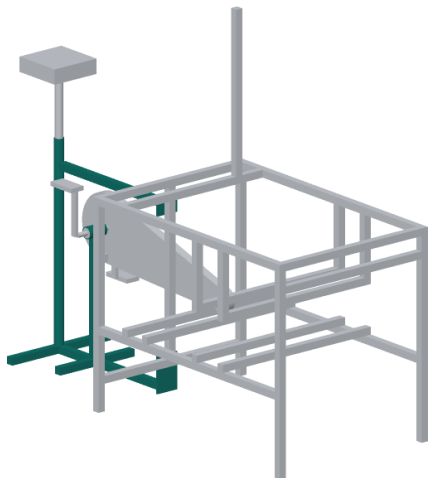

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Spine 529 on the ground, toward the frame; cross feet 400 (seat end) and 300 (under the pedal post), welded under it.

Pedal post 393 tall on the spine, 185 from its far end; weld a bottom bracket shell cut from a scrap bicycle frame on top, its axis across the machine, centre 438 above the ground.

Seat tube: round 32 x 2 tube, 675 long, 172 behind the pedal post; slot its top 40 mm and fit a bicycle seat clamp.

Top arm 504 from the seat tube to the frame end, 600 to 625 up.

End plates 80 wide, 6 mm, welded across the spine end (125 tall) and the top arm end (65 tall); two 9 mm holes in each.

Fit: the lower plate bolts to the low end member, the upper plate to the end post; four M8 bolts. Outrigger 6 mm clear of the frame.

Check: bottom bracket axis square to the spine and level.

GRAVITYSORT

github.com/BoujeeEnjinia1701/gravitysort

GravitySort pedal outrigger: making sketch

DRAWING NO.

GVS-DWG-102

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Square tube 25 x 25 x 1.5; round tube 32 x 2; plate 6 mm