



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

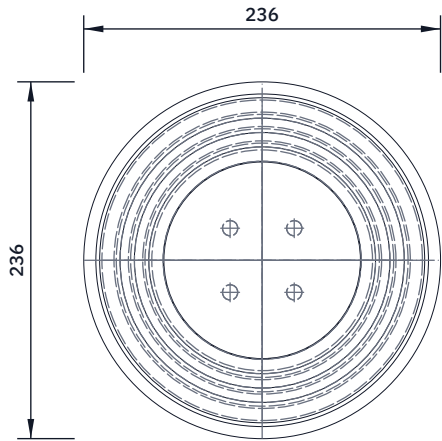


TOP VIEW

Scale 1:5; looking down (along -Z)

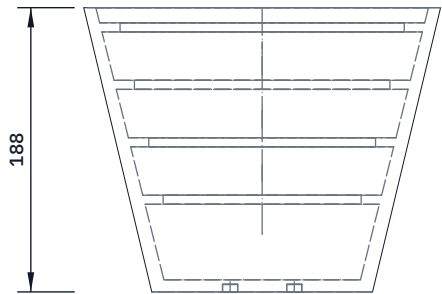

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

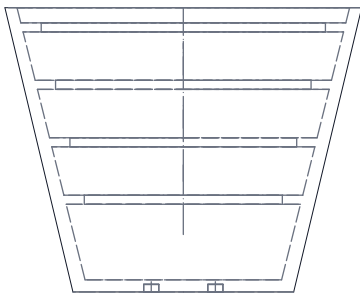

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Inside: 130 across the floor, 220 across the lip, 180 deep.

Four riffle rings, 6 thick, standing 12 in from the wall, the first 50 above the floor, then every 38.

Core: print the inside shape (with the ring grooves) in six segments round a central key, so it comes out past the rings: pull the key, then lift the segments inward one by one.

Set four M6 stainless nuts on the shell floor over its holes, bolts through from below to hold them, release-coated threads.

Centre the core in the shell on its lip spigot; pour the polyurethane slowly from one side; cure as the maker says.

The liner bonds to the shell; it is replaced with the shell.

Check: no voids at the ring lips; floor 8 mm thick over the nuts.

GRAVITYSORT

github.com/BoujeeEnjinia1701/gravitysort

GravitySort bowl liner: making sketch

DRAWING NO. GVS-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Cast polyurethane, Shore 80 to 90A, 8 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand