



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

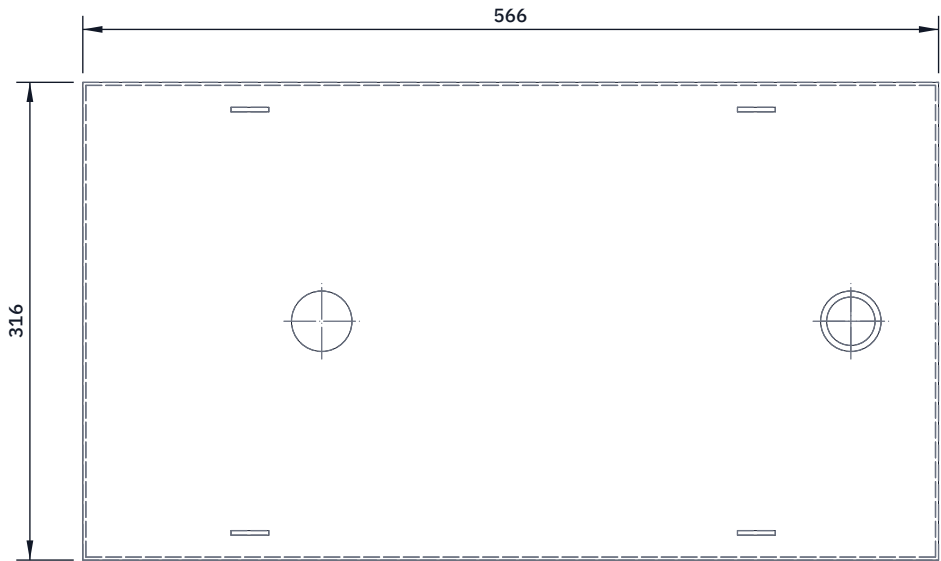

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

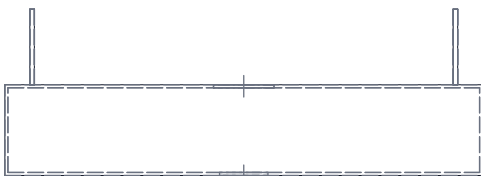

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

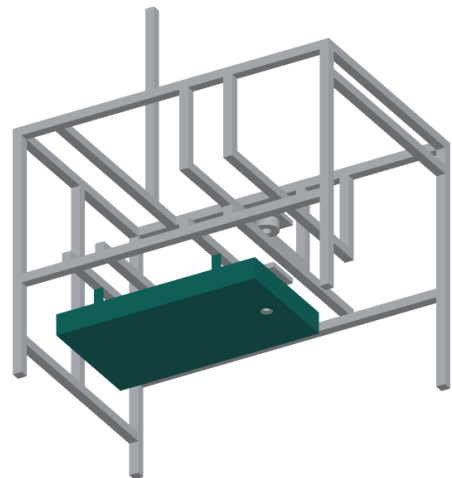

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A shallow box round both pulleys: 566 x 316 x 60 tall.
Fold a tray (bottom and sides) and a separate lid (top), so the belt can be fitted and checked with the tray off.
Top: 40 mm holes over the gearbox shaft and the spindle.
Bottom: 32 mm hole for the spindle foot; the union stays below.
Four hangers 25 x 3 flat bar, 50 tall, bolted to the top and to the undersides of a gearbox member and a spindle member.
Speed sensor: on a bracket under the top, beside the driven pulley.
Fit: 6 mm clear of both pulleys and the belt all round.
Check: no finger can reach a pulley through any opening.
Never run the machine with this guard off.

GRAVITYSORT				github.com/BoujeeEnjinia1701/gravitysort			
GravitySort bowl belt guard: making sketch							
DRAWING NO. GVS-DWG-111			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Perforated steel sheet 1.2 mm; flat bar 25 x 3							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	