



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

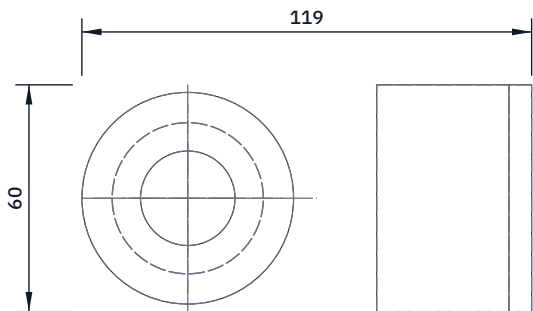


TOP VIEW

Scale 1:2; looking down (along -Z)

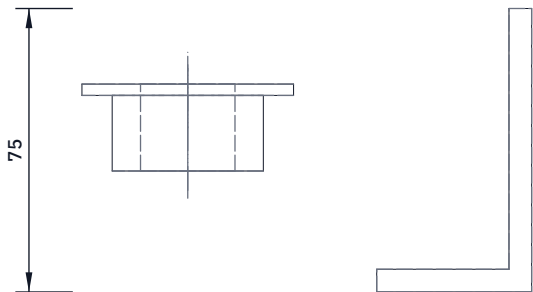


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

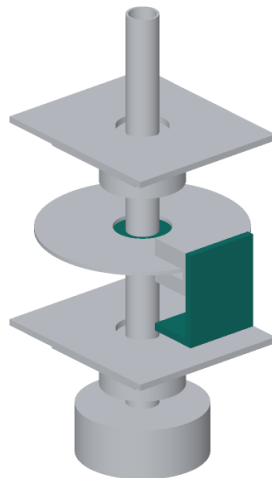

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Brake flange: 6 mm disc 56 across, six M5 holes on a 44 mm circle (the disc's own pattern), welded square on a 25 mm bore shaft collar, 40 across and 20 long. Face it true after welding.
Caliper bracket: 6 mm plate, an L: foot 41 x 60 on the right spindle member (two M6), upright 60 wide, 75 tall, 6 off the disc edge. Drill the caliper's mounting holes to suit the caliper bought (post mount or the older standard).
Fit: collar 173 to 196 up the spindle, disc on the flange; the disc runs in the caliper slot with 2 mm each side.
Check: disc runs true within 0.3 mm (dial or feeler at the pads).

GRAVITYSORT

github.com/BoujeeEnjinia1701/gravitysort

GravitySort brake flange and caliper bracket: making sketch

DRAWING NO. GVS-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 6 mm; 25 mm bore shaft collar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	