
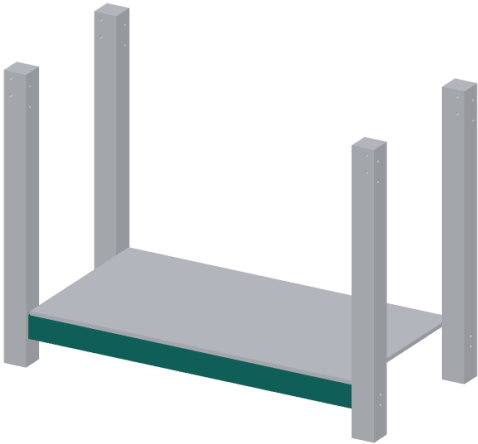
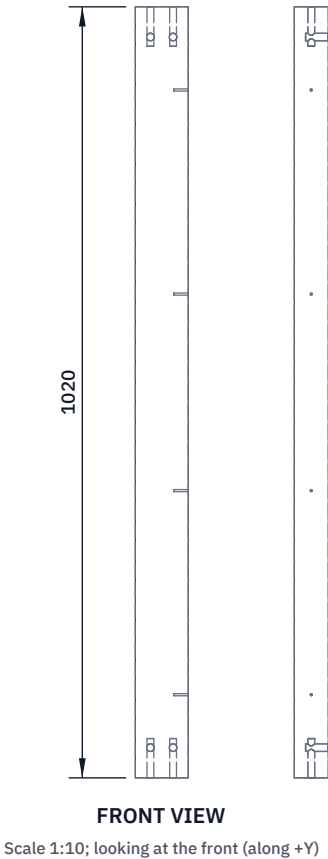


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Shelf screwed down into the top face	2026-10-02	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 45 x 70 mm softwood to 1,020 mm, ends square.

In each end: two 9 mm holes along the length, 52 mm deep, centred in the thickness, 20 and 50 mm up from the lower edge.

In the inside face: two 10 mm cross dowel holes 30 mm deep, 40 mm from the end, at the same heights.

Fit: butts between the legs on their centre line, 105 mm above the floor (80 mm above the foot of the leg); two M8 x 120 bolts and cross dowels at each end. The shelf rests on its top face and is screwed down into it at four points: 3 mm pilot holes, 20 mm deep, drilled through the shelf in step 7.

Check: same length as the long aprons within 0.5 mm.

GRIDBENCH				github.com/BoujeeEnjinia1701/gridbench			
GridBench low rail (make 2): making sketch							
DRAWING NO. GBN-DWG-104			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Sawn softwood 45 x 70 mm, C16 or better							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	