

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Eight countersunk screw holes; shelf screwed to the low rails	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

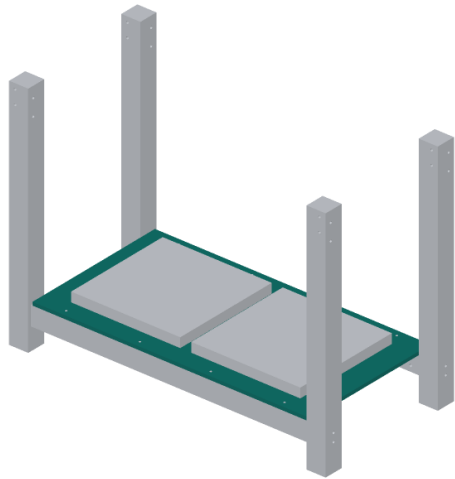

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 12 mm plywood to 1,010 x 535 mm, square.
Round the corners about 5 mm and sand the edges.
Drill eight 4.5 mm holes, countersunk for an 8 mm head: four along each long edge, 22.5 mm in from the edge, at 105, 375, 635 and 905 mm from the left end.
Fit: rests on the top faces of the two low rails, flush with their outside faces, 5 mm clear of the legs at each end. It is slid in from the front, above the front low rail, then lowered and held down by eight 4 x 30 mm countersunk wood screws into the rails.
It carries the two ballast slabs, side by side, 40 mm apart.
Check: it lies flat on both rails and does not touch a leg.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench shelf: making sketch

DRAWING NO. GBN-DWG-107			REV P2	SHEET 1 of 1		SIZE ANSI B	
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Plywood 12 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com Generated from cad/src; do not edit by hand							