


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Red rings at the 122 light-duty screw-in positions	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

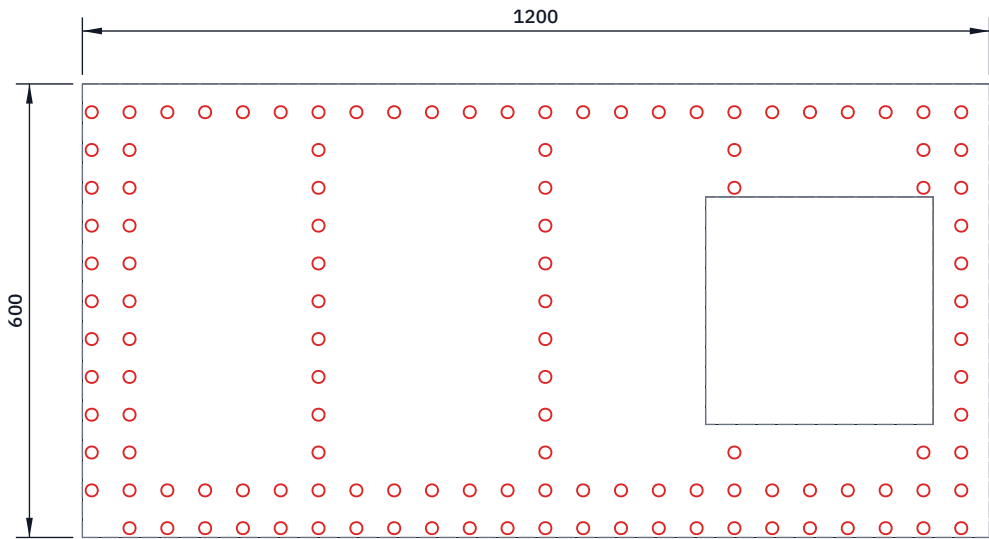


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

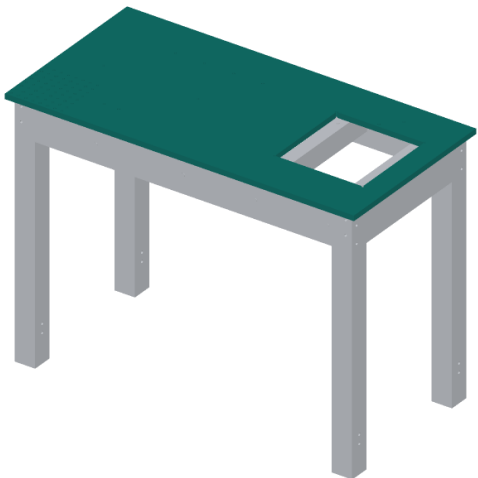

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 18 mm birch plywood to 1,200 x 600 mm, square within 0.5 mm.

Holes (shown on the hole layout, not here): 1,008 on a 25 mm grid, first centres 12.5 mm from the left and front edges; 756 plain 6.6 mm, 130 at 8.0 mm for tee nuts, 122 at 8.5 mm for screw-in inserts.

Drill on a shared CNC router, or with a printed drilling template indexed from the left and front edges, never from the last hole.

Tile pocket: 301 x 301 mm right through, 824.5 to 1,125.5 mm from the left edge and 149.5 to 450.5 mm from the front edge. Drill an 8 mm relief hole on each corner first, then jigsaw and rout to the line.

Round all edges 1 mm; seal both faces with a thin finish.

Red rings (top view): paint a ring about 16 mm across round each of the 122 screw-in positions in a contrasting colour. They are light duty: a clamp there is tightened to 0.92 N m at most.

Fit: on the aprons and rails, held by nine steel brackets from below.

Check: corner to corner diagonals equal within 1 mm.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench worktop: making sketch

DRAWING NO. GBN-DWG-108			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Birch plywood 18 mm, one 1,200 x 600 mm panel					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand