



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

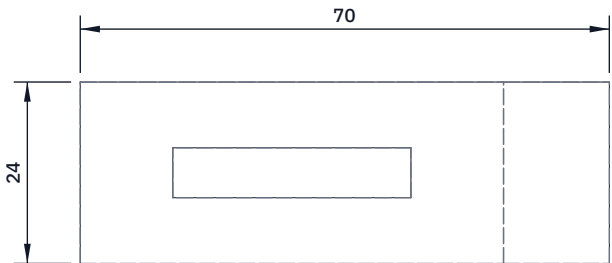


TOP VIEW

Scale 1:1; looking down (along -Z)

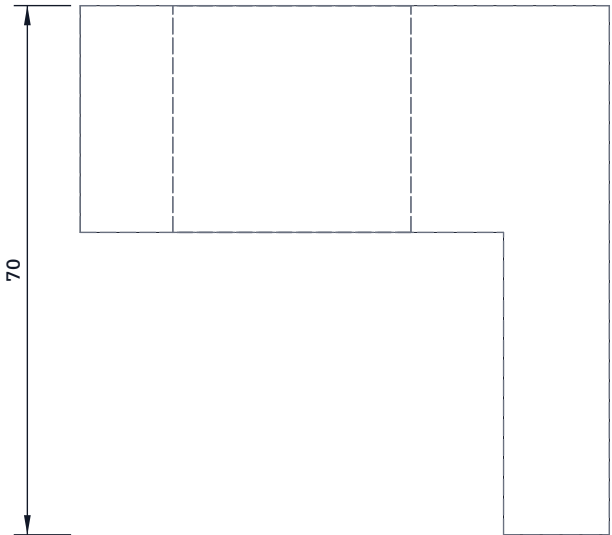


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

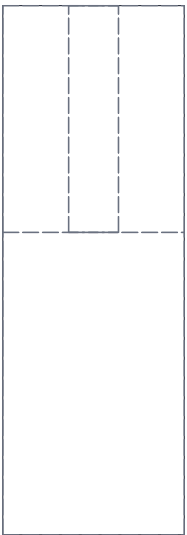

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

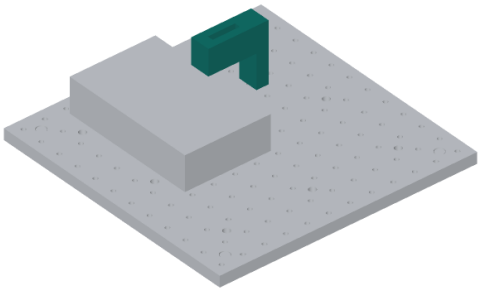

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print four in PETG lying on a side face, so the layers run along the clamp: 6 walls, 40 % infill, about 50 g each.

Body 70 long, 24 wide, 30 deep. Slot 6.6 mm wide, 31.5 mm long, its centre 7 mm from the middle toward the toe end.

Heel at the other end, 14 mm long, as tall as the work (40 mm here).

Fit: an M6 x 80 cap screw with a printed knob passes through the slot into a threaded hole; the toe presses the work, the heel stands on the table. Slide the body so the screw is nearer the toe.

Mark 1.6 N m MAX on the top: never tighten past it.

Check: no cracks or gaps between layers at the slot ends.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench printed toe clamp (make 4): making sketch

DRAWING NO. GBN-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 6 walls, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand