



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

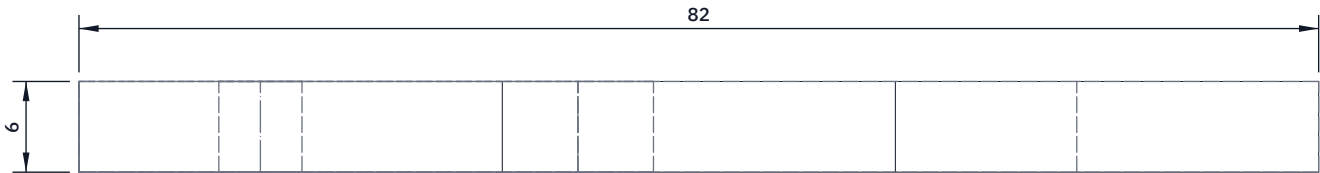


TOP VIEW
Scale 2:1; looking down (along -Z)

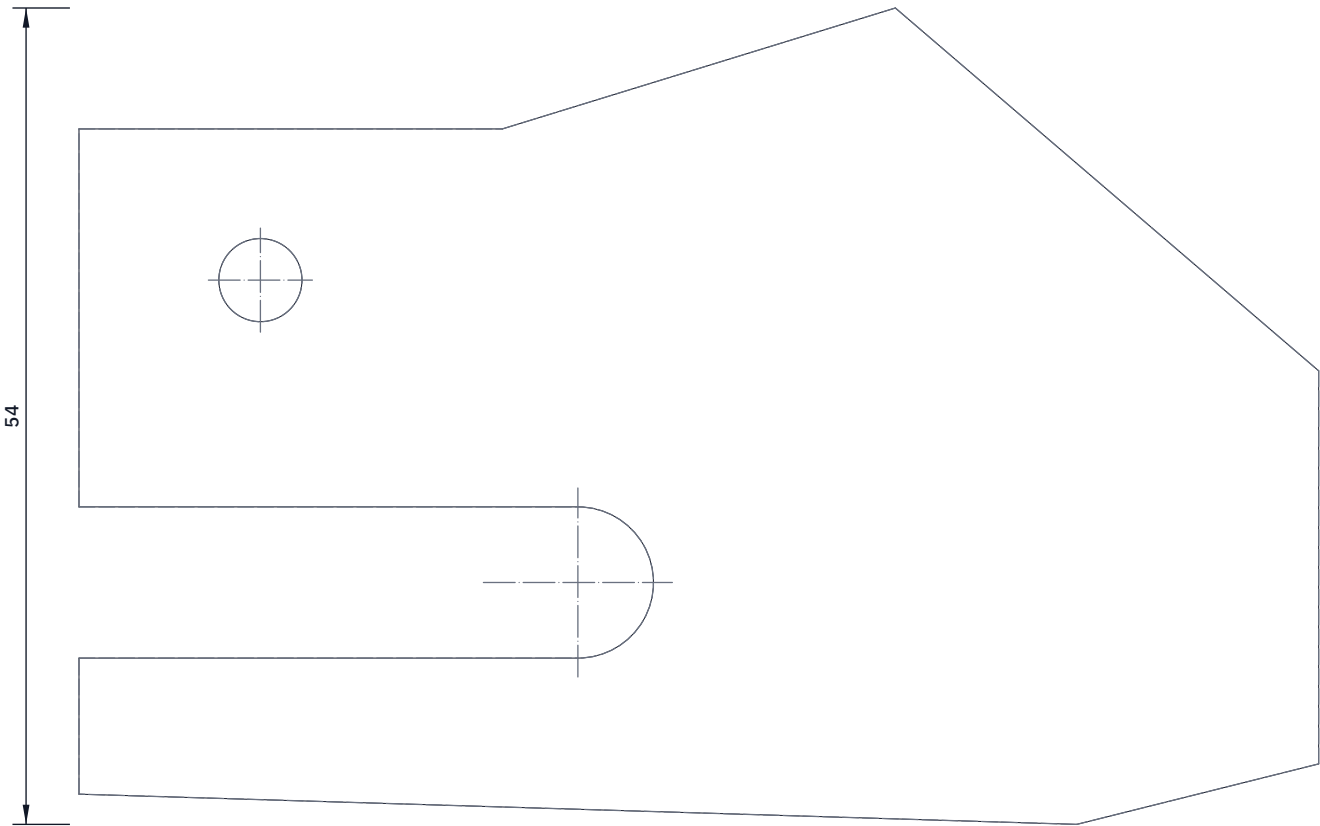

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

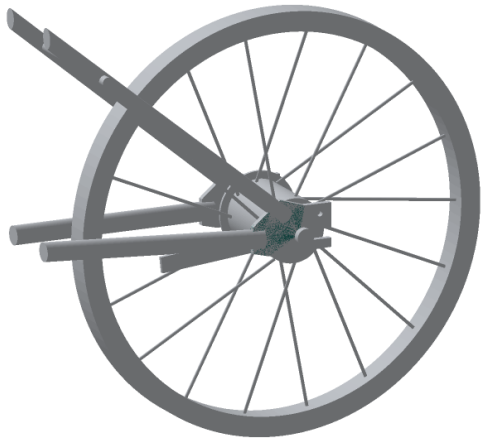

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, mirror images. Mark out on 6 mm steel plate; positions are from the axle center (the middle of the slot's round end is 3 mm ahead).

Outline: 82 long, from 30 behind to 52 ahead of the axle; 54 tall, from 16 below to 38 above it. Saw and file; break every edge.

Axle slot 10 wide, open to the rear, round end 3 mm ahead of the axle: drill 10 mm at the round end, saw the two sides, file parallel.

Eyelet: 5.5 mm hole 18 behind and 20 above the axle (rack and fender).

Fit: the chainstay end (40 ahead, 1 above the axle) and the seat stay end (16 ahead, 20 above) are slotted 6 mm and brazed over the plate.

The inner faces sit 110 apart for the coaster hub. The axle slides back in the slot to tension the chain.

Check: a 3/8 in axle slides the length of the slot without binding.

GROWRIDER

github.com/BoujeeEnjinia1701/growrider

GrowRider rear track-end dropout (make 2, a left and a right): making sketch

DRAWING NO. GRR-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES Steel plate 6 mm (S235 or 4130)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	