


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

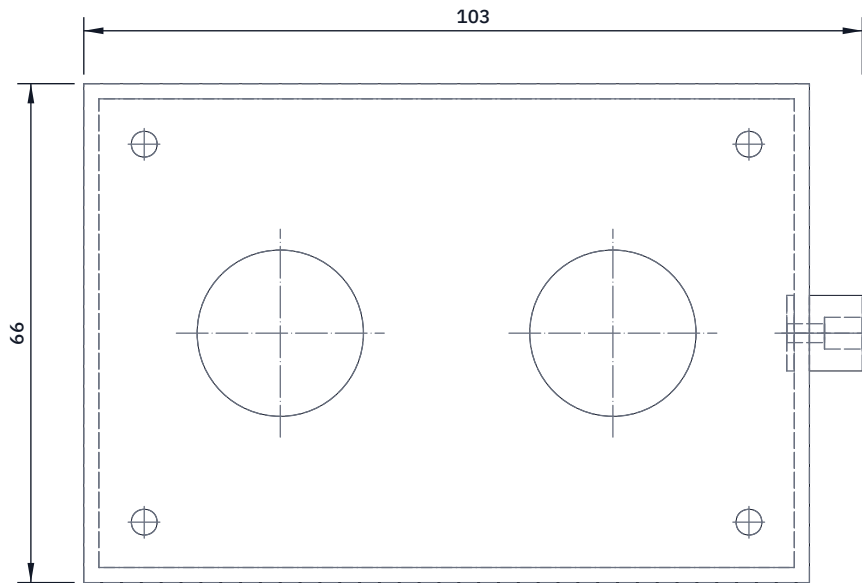


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

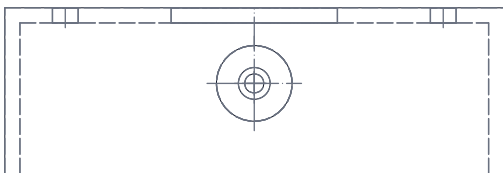

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

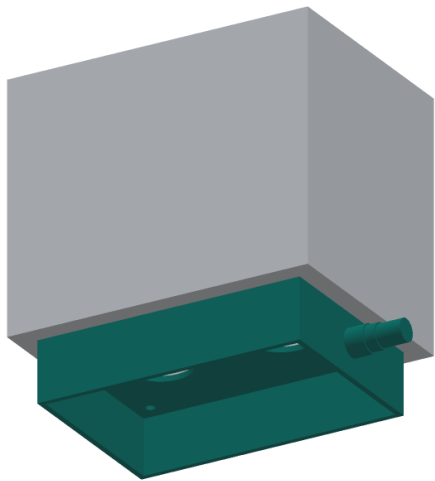

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 96 x 66 x 22 mm, walls and top plate 2 mm, open at the bottom.

Print it top plate down on the bed; no supports needed.

Top plate: two 22 mm openings 22 mm each side of centre, to line up with the ports; four 3.4 mm holes at 80 x 50 mm for the screws.

Right side: a 10 mm boss standing 8 mm proud, its centre 10 mm below the top plate; a 2.5 mm gas way through it into the cup.

Tap the boss M5 6 mm deep (drill 4.2) for the push-in fitting.

Inside volume about 114 mL; it is the bump test cup.

Fit: the four M3 screws that hold the standoffs pass up through the top plate, so the cup is held flat under the head floor.

Check: the openings sit over the ports; the fitting does not leak.

H2Guard bump test cup (drip skirt): making sketch

DRAWING NO. HGD-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	

MATERIAL / NOTES
PETG, 3D printed, 4 perimeters, 40 % infill