

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

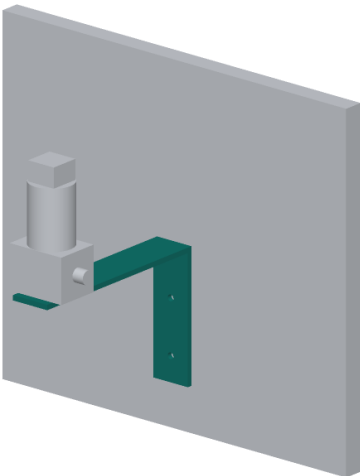

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 330 mm of 40 x 5 mm flat bar. Bend 90 degrees in the vice to an L, measured outside the bend: a 132 mm upright leg on the wall and a 200 mm arm standing out from it.

Upright leg: two 6.6 mm holes on the centre line, 25 and 80 mm up from its bottom end, for M6 screws with wall plugs.

Arm: two 5.5 mm holes on the bar's centre line, 152 and 188 mm out from the wall face (36 mm apart), for the valve screws.

Match these two holes to the tapped holes under the valve you buy.

Fit: arm level, 1,272 mm above the floor; valve on top on two M5 screws from below. The gas fitter connects the valve ports.

Check: the arm is level and does not flex when the valve is pushed.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard valve bracket: making sketch

DRAWING NO. HGD-DWG-109		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 40 x 5 mm, 6082 class				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	