




CONCEPT, NOT FOR FABRICATION

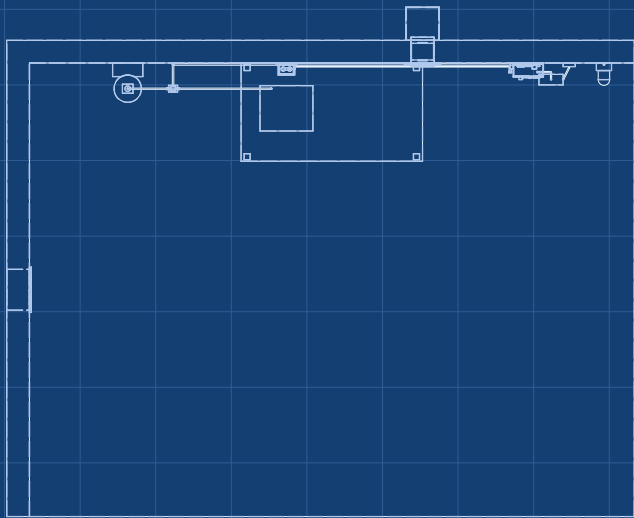


TOP VIEW
Scale 1:50

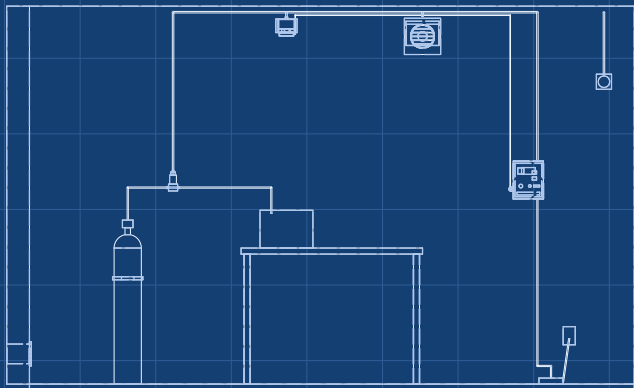

FRONT VIEW
Scale 1:50

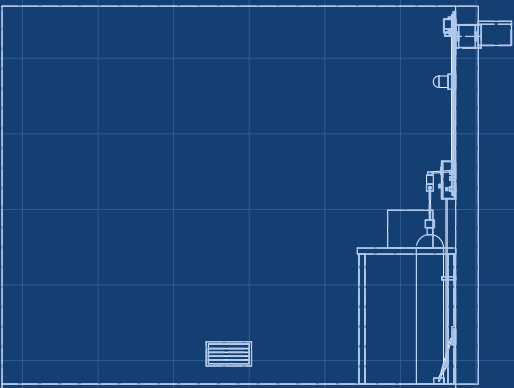

RIGHT VIEW
Scale 1:50

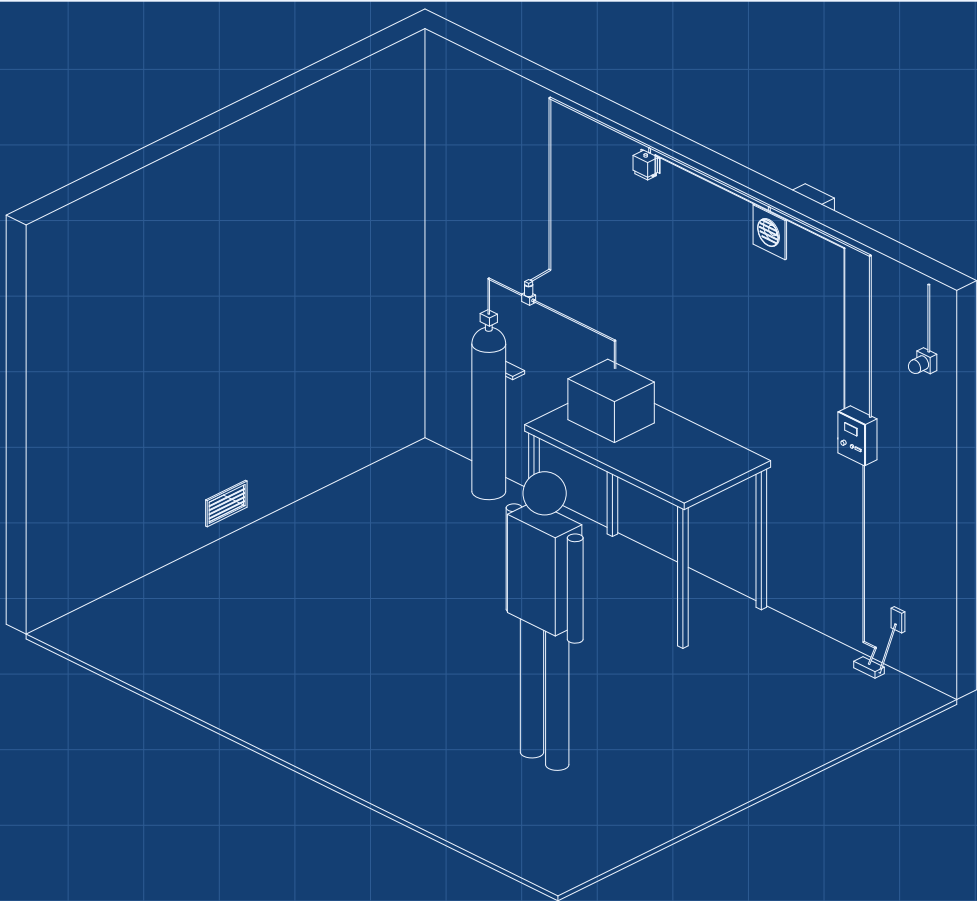

ISOMETRIC VIEW
Not to scale; figure is a 1.75 m person

KEY FIGURES

Warn at 10 % LFL (0.4 % vol H₂); trip at 25 % LFL (1.0 % vol)
Leak to valve closed 35.7 s with t₉₀ 30 s assumed (HGD-CAL-001)
Exhaust 150 m³/h continuous, 347 m³/h boost; room 5 % LFL
Fail-safe: NC valve, series hardware trip relay, 1 s watchdog
24 V DC build; mains only inside a certified supply
Warning held 5 min also closes the valve (DDR-002)
Parts \$264 (indicative); budget \$265

H2GUARD

Leak detector and interlock concept

DRAWING NO.

HGD-DWG-010

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:50

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

Built from cad/src/model.py; room, bench and gas store are context. GA is HGD-DWG-001

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand