



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

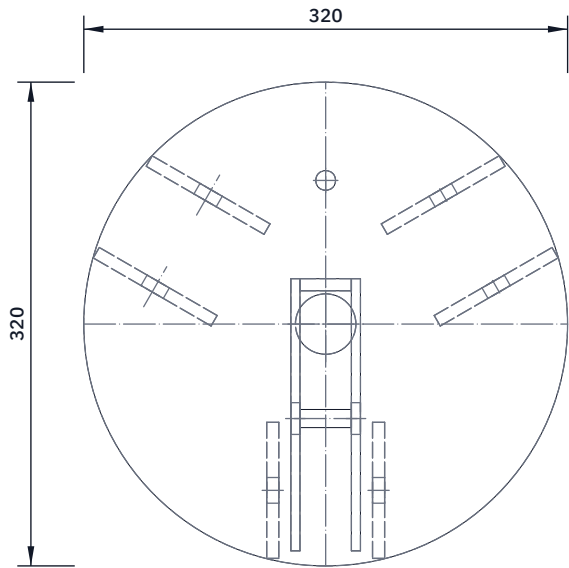


TOP VIEW

Scale 1:5; looking down (along -Z)

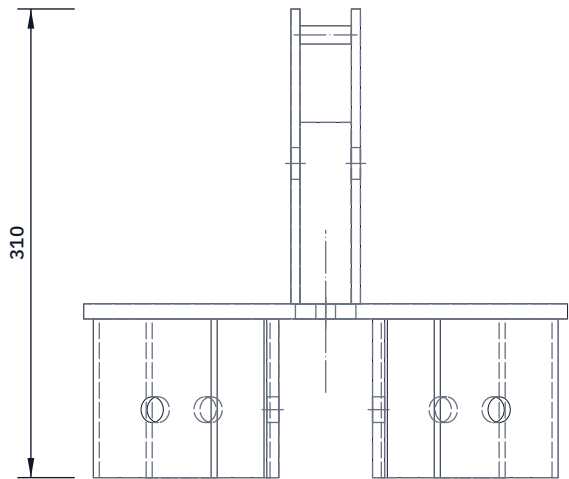

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

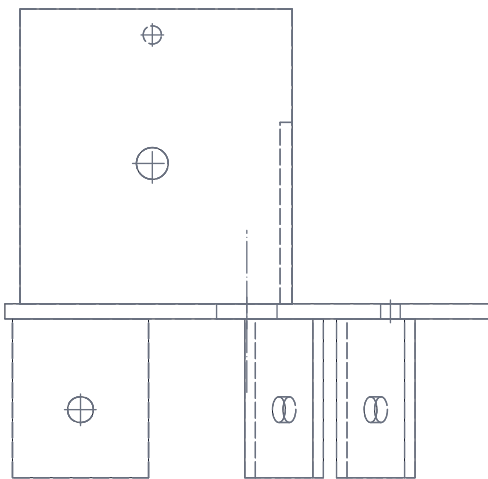

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Head plate: 320 disc x 10, 40 hole in the centre for the rope,

13 hole 95 from the centre (away from leg A) for the eye bolt

Lugs: six 8 mm plates 90 wide x 105 high, in pairs 62 apart

inside, at 120 deg; 17 hinge hole 60 below the plate, 110 out

Cheeks: two 6 mm plates 180 x 195, 34 apart inside, on the

centre line over leg A; 21 axle hole 63 toward leg A, 93 up

Rope keeper 12 bar across the cheeks 85 above the axle

Gusset 8 mm across the cheeks' back edge, 120 high

Jig the lugs with three 52 mm spacers and a 16 mm rod

Fillet welds 6 mm both sides; competent welder; then galvanize

HATCHSIDE

github.com/BoujeeEnjinia1701/hatchside

Tripod head with mast cheeks: making sketch

DRAWING NO. HTS-DWG-104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES S275 plate 10, 8 and 6 mm; welded; hot-dip galvanized				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	