


CONCEPT, NOT FOR FABRICATION


HeatMap Node · github.com/BoujeeEnjinia1701/heatmap-node

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-30	AC

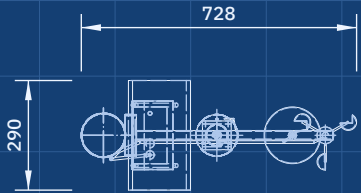


TOP VIEW

Scale 1:20; looking down (along -Z)

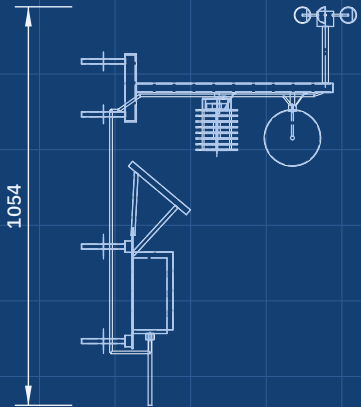


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

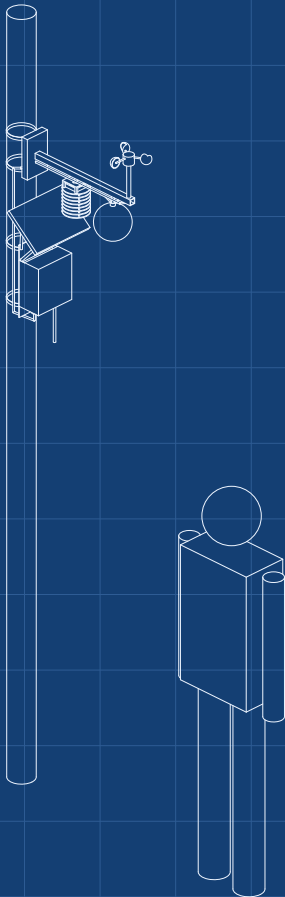

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Air temperature and humidity in a fan-aspirated shield, 150 mm globe, wind
Sensors at about 2.7 m; arm and FieldNode core below it face the equator
Example: 35 C air, 40 %RH, 50 C globe, 1 m/s: MRT 74.8 C, WBGT 31.7 C (HMN-CAL-001)
Shield error 0.43 C with the fan; sensors and fan 35 mW of a 100 mW allowance
Sensor head \$127 (budget \$130), 1.91 kg; full node \$268 (estimates)

HEATMAP NODE

github.com/BoujeeEnjinia1701/heatmap-node

Street heat stress node concept

DRAWING NO. HMN - DWG - 010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	