



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

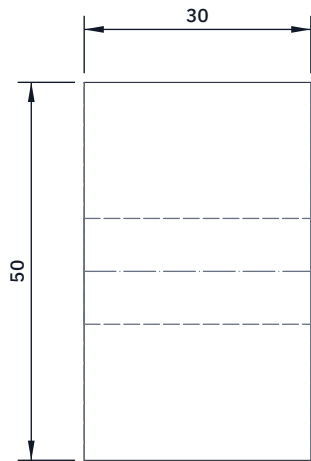


TOP VIEW

Scale 1:1; looking down (along -Z)

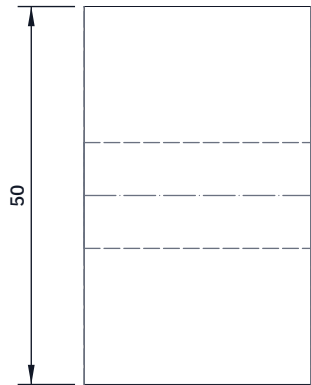


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

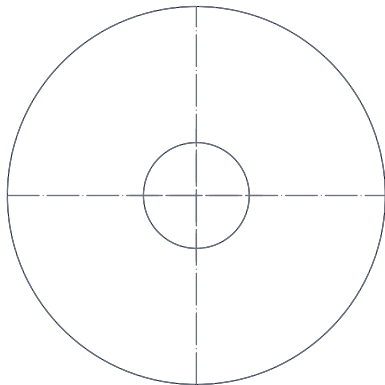

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

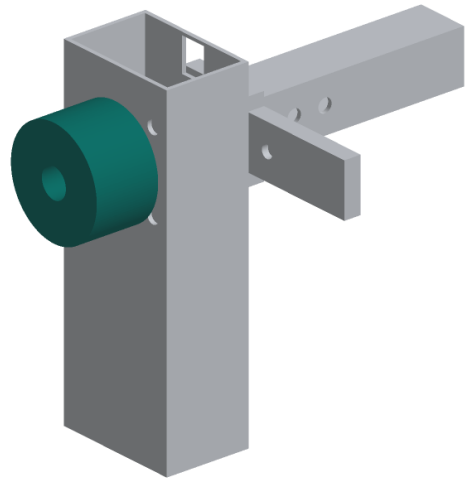

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Elevation can: a 50 mm diameter cup 30 mm long with a 14 mm centre hole through its closed end, the open end toward the arm.

Three 4.5 mm holes on a 40 mm circle, lengthwise, for M4 screws into the left arm and plug. A 3 mm pin hole near the rim inside holds the spring's outer end.

Azimuth can: the same cup at 52.5 mm diameter, a push fit in the mast pipe, with an M5 insert in its side for a screw through the pipe wall, 37 mm below the pipe's top end.

Fit the bought flat spiral spring: inner end in the stub's slot (or the shaft's), outer end on the pin. Wind it 1 turn before fixing so it holds about 3 N m toward stow.

Check: the spring holds the shaft one way with no slack.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite spring can (make 2, printed): making sketch

DRAWING NO. HLT-DWG-114		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES ASA, printed; 100 % infill				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	