


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

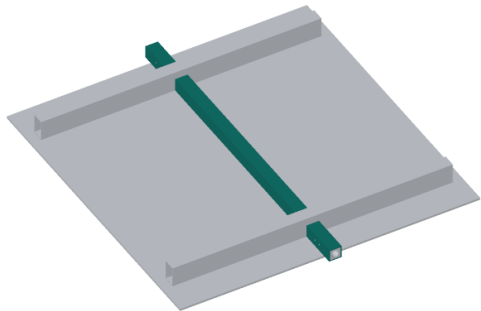

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut to 635 mm (1 mm shorter than the 636 mm between the bush flanges, so the mirror drops into the yoke). Square both ends.

Through both side walls, 6.5 mm holes 35 and 50 mm from each end (end block bolts), on the centre line of the side.


Through both side walls, a 5 mm hole 20 mm from each end (cross pin): drill these with the end blocks and stubs in place (step 11).

On the left end only: a shallow 4 mm spot 11 mm from the end on the face away from the panel, for the stow lug's set screw.

Deburr inside and out so the end blocks slide in.

Fit: runs through both rib tunnels, its top face bonded to the panel with structural silicone; ends 318 mm each side of the centre.

Check: straight within 0.5 mm over its length on a flat bench.

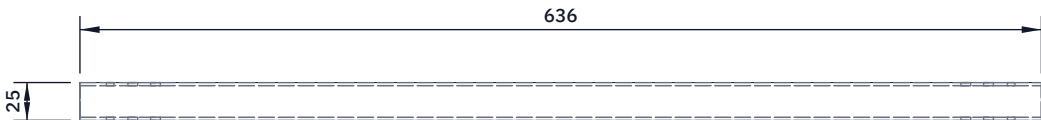

TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

HELIOHITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite torque tube: making sketch

DRAWING NO. HLT-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminum square tube 25 x 25 x 2 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		