
CONCEPT, NOT FOR FABRICATION


Helpful Water C · github.com/BoujeeEnjinia1701/helpful-water

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model (HWC-CAL-001)	2026-11-11	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

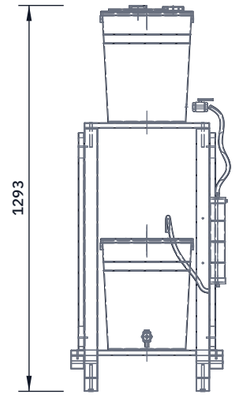


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

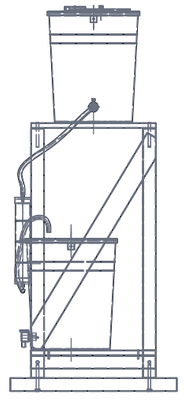

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

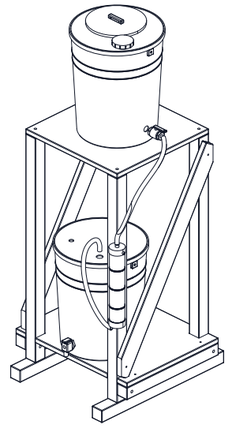

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND DATA

Footprint 520 x 560 (feet); 1303 tall with the raw lid
Upper shelf top 900; lower shelf top 138; raw rim 1270
Raw outlet 50 above the raw floor: 2.6 L settling zone
Fill line 17 L; batch 14.3 L; clean refill line 2 L
Head 0.42 to 0.66 m (4.1 to 6.4 kPa)
Module 600 looped fibres 0.8/0.5, 0.66 m2, 0.1 um; 50 x 290
Flow (estimate): 30 L/h clean, 16 L/h before backflush
45 L a day in 1.5 to 2.8 h of filtering (estimate)
Tip angle loaded 19 deg on the 560 mm feet
Backflush: 60 mL luer syringe at the tee, pinch clamp shut
Not a virus barrier; dose chlorine (solution D) in the raw bucket first
PRELIMINARY, NOT FOR FABRICATION

HELPFUL WATER C

github.com/BoujeeEnjinia1701/helpful-water

C1 two-bucket hollow-fibre filter on its timber stand: general arrangement

DRAWING NO.	REV	SHEET	SIZE
HWC-DWG-001	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-11-11	Amish Chadha

MATERIAL / NOTES

Food-grade HDPE buckets; PP fittings; silicone hose; bought hollow-fibre module; softwood and plywood stand. See bom/bom.csv

Licensed CERN-OHL-P-2.0 · Design Molecule Labs with Helpful Engineering

Generated from cad/src; do not edit by hand