
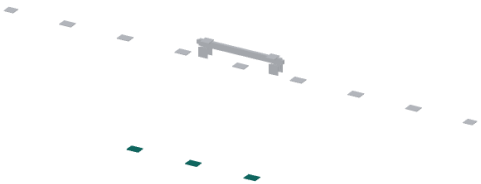


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

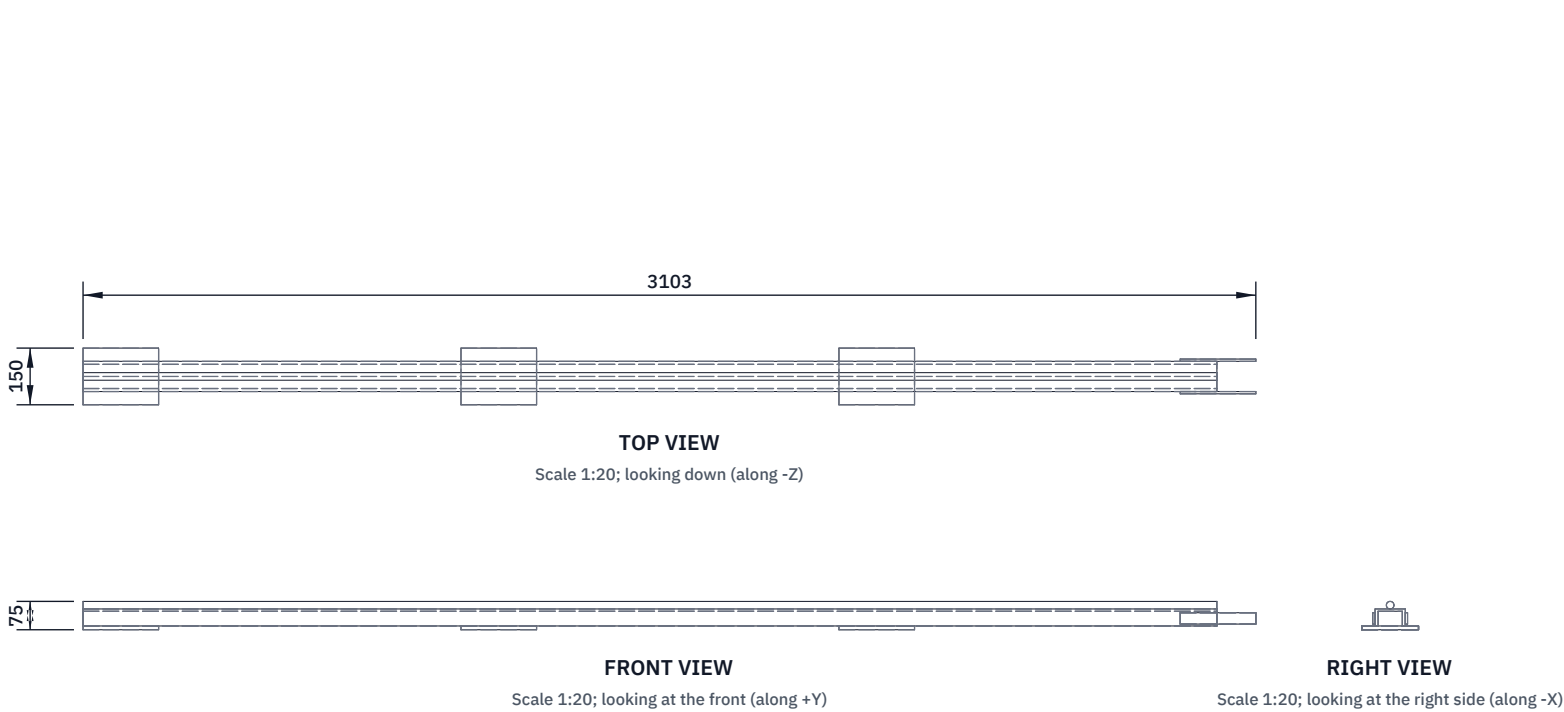

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make eight. Saw UPN 80 channel 3,000 mm long, square ends. It lies flanges down: the flat 80 mm web on top, flanges on the pads.

Rail: 20 mm round bar along the middle of the web, stitch welded both sides, 40 mm welds every 250 mm. Grind the joint ends flush.

End modules: stop the bar 70 mm short of the outer end.

Fishplates: 6 x 30 x 200 mm flat, one each side across each joint, two M12 bolts in 14 x 24 mm slots so the joint can slide 6 mm.

Pads: 200 x 150 x 10 mm plate, one every 1,000 mm and under each joint, bedded level on a thin lime-sand mortar on the wall top.

End stops: 8 mm plate box 60 x 80 x 200 mm, rubber face, two M12 bolts down through the web at each track end.

Check: bar straight within 2 mm over 3 m; tops of the two wall tracks level with each other within 5 mm.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck track module (make 8) with pads: making sketch

DRAWING NO. KND-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha	
MATERIAL / NOTES UPN 80 channel 3,000 mm; 20 mm round bar; 6 mm flat; 10 mm plate; S275					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		