



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

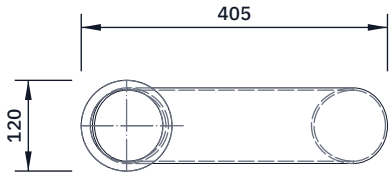


TOP VIEW

Scale 1:10; looking down (along -Z)

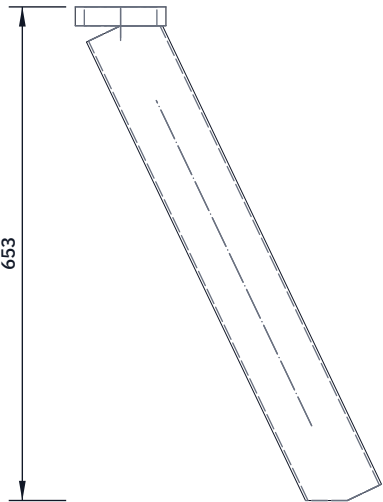


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

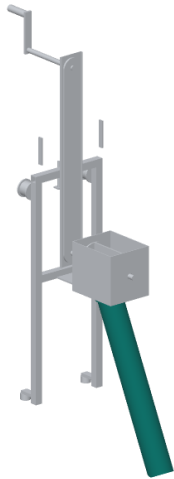

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Collar: turned ring 120 mm outside, 96 mm inside, 25 mm tall; a lip on the housing outlet holds it so it can swivel.

Tube: 100 x 3 mm, cut at both ends so it leans outward 300 mm over a 650 mm drop; welded to the collar.

Outlet: 150 mm above the wall-top level, 1,225 mm out from the deck centre line, over the row of feed holes beside the deck.

Handle: a 12 mm bar loop on the tube to aim it.

Check: swings 30 degrees each way without touching the frame.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck swing spout: making sketch

DRAWING NO. KND-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 100 x 3 mm steel tube; turned collar from 120 mm bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	