REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

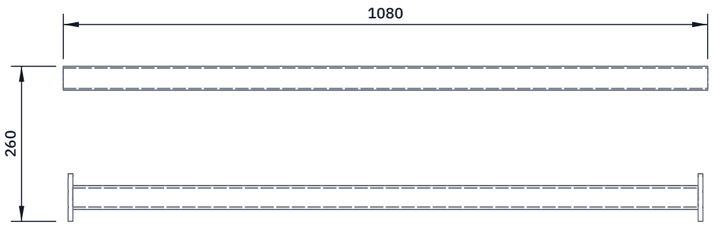

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

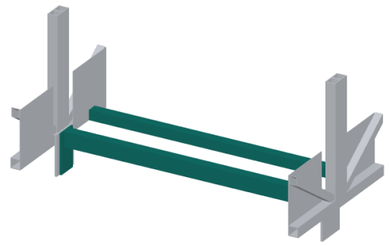

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Frame bearer (back in the sketch): RHS 60 x 40 x 4, 1,048 mm, with an 8 x 80 x 80 mm end plate welded on each end: overall 1,064 mm.
Four 13 mm holes per end plate, 20 mm in from each edge; they match the cleats on the trusses. M12 grade 8.8 bolts.
The frame bearers sit at both deck ends and at the three splices, and make each pair of verticals and the floor a stiff U-frame.
Panel bearer (front): SHS 40 x 40 x 3, 1,080 mm, top flush with the chord tops; held by 50 x 50 x 5 angle cleats and 2 x M10 each end.
Hangers for the line shaft: 6 mm plate under each frame bearer, 380 mm right of the middle (see the drive sketch).
Check: tops of all bearers level with the chord tops within 1 mm.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck frame bearer (make 5) and panel bearer (make 4): making sketch

DRAWING NO.	REV	SHEET	SIZE
KND-DWG-104	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

RHS 60 x 40 x 4 mm; SHS 40 x 40 x 3 mm; 8 mm plate; S275

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand