
CONCEPT, NOT FOR FABRICATION


KilnDeck · github.com/BoujeeEnjinia1701/kilndeck

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the constructable TRL 3 model (KND-DDR-002)	2026-10-03	AC
P2	Storm clamps and lashing lugs (D12); deeper bearer cleats, end flange bearings (D13)	2026-10-28	AC
P3	Five truss modules a side and 2.4 m track modules for the 33 kg team limit (D14, 2026-...	2026-10-30	AC

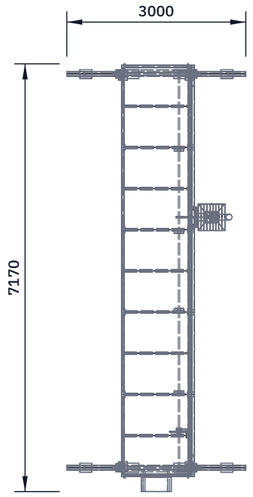


TOP VIEW

Scale 1:100; looking down (along -Z)




FRONT VIEW

Scale 1:100; looking at the front (along +Y)



RIGHT VIEW

Scale 1:100; looking at the right side (along -X)

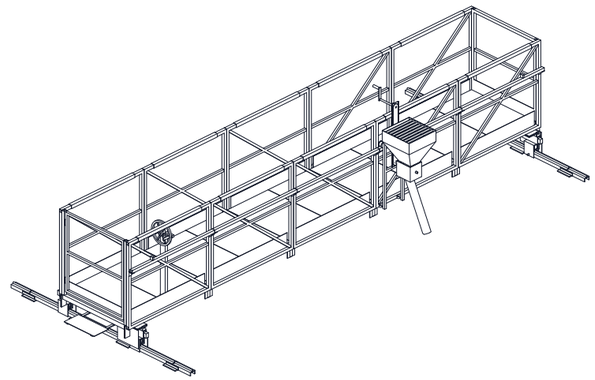

ISOMETRIC VIEW

Not to scale; track shown 2.4 m long; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND DATA

Track centres 6600 across a 6000 trench (to survey)
Deck 6900 long, 1160 wide over the trusses
Wheelbase 1200; 100 mm U-groove wheels on 20 mm bar
Rail top 75, floor 393 above the wall top
Top rail 1100, knee rail 550, toe board 150 above floor
Five truss modules a side, 1380 long, 6 x M12 per splice
Floor: 10 panels, 2 steel / 37 board / 1 aluminium
Line shaft 25 dia at 250; hand wheel 320 dia
Carriage rail top 1143; carriage travel +/-2900
Hopper 450 x 450, about 52 L; rotor 160 dia x 200
Spout outlet 1225 from deck centre line, 150 up
Crank at 1653, over the top rail
Deck about 853 kg; pieces up to 35 kg (33 kg limit); storm clamps at each wheel
PRELIMINARY, NOT FOR FABRICATION

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

Rolling fuel-feeding deck: general arrangement

DRAWING NO.	REV	SHEET	SIZE
KND-DWG-001	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:100	mm		2026-10-30	Amish Chadha

MATERIAL / NOTES

S275 hollow sections, channel and plate; calcium silicate board; aluminium sheet. See bom/bom.csv

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand