REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

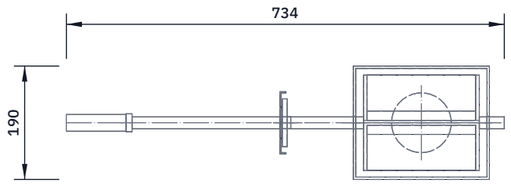

TOP VIEW

Scale 1:10; looking down (along -Z)

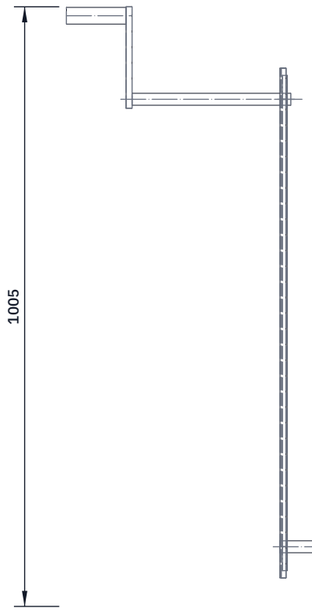

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

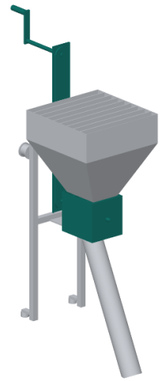

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Housing: 4 mm plate box 228 x 190 x 200 mm tall, open at the top to the hopper outlet; 100 mm round outlet in the bottom.
Rotor: 40 mm hub on a 20 mm shaft, two 8 mm plates welded across it to make four vanes, 160 mm diameter, 194 mm long, 6 mm end discs; 3 mm clear of the housing all round. About 0.77 L a pocket.
Shaft: in two flange bearings on the housing ends; it runs inward to a 15-tooth sprocket beside the carriage post.
Chain up to a matching sprocket on the 20 mm crank shaft, which passes over the top rail to a 140 mm crank and handle on the deck side, 1,260 mm above the floor. Sheet guard round the chain.
Check: rotor turns by hand with no rub; one turn, four pockets.

KILNDECK

github.com/BoujeeEnjinia1701/kilndeck

KilnDeck metering rotor, housing and crank: making sketch

DRAWING NO.	REV	SHEET	SIZE
KND-DWG-111	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

8 mm plate; 40 mm bar; 20 mm bright bar; 4 mm plate; ISO 08B-1 chain

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand