


CONCEPT, NOT FOR FABRICATION


Kitewright Core · github.com/BoujeeEnjinia1701/kitewright-core

REV	DESCRIPTION	DATE	BY
P1	First issue, constructable design (KWC-DDR-002)	2026-10-03	AC
P2	Decision 33B: carbon plate, pocketed rails, leads to the frames (KWC-DDR-0...	2026-10-03	AC

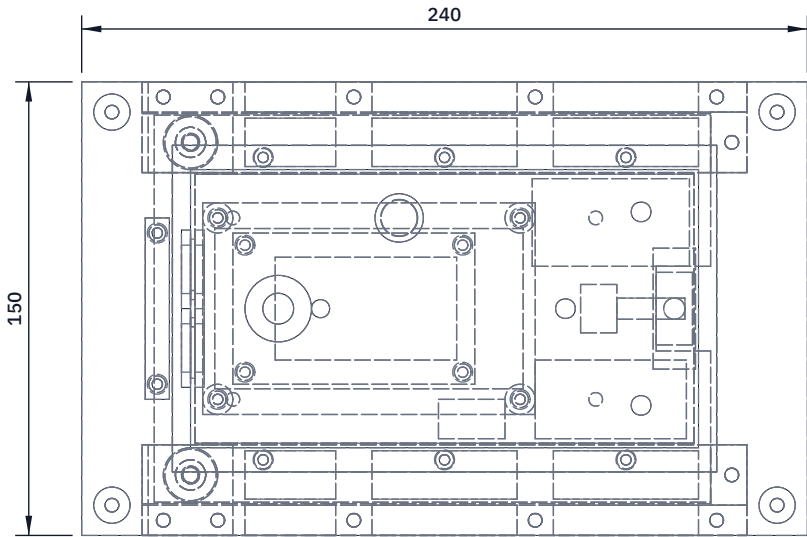


TOP VIEW

Scale 1:2.5; looking down (along -Z)

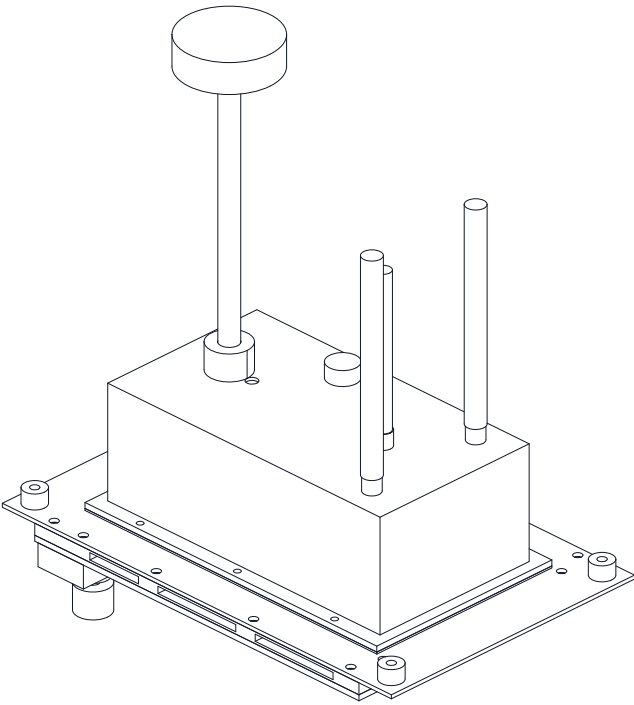


ISOMETRIC VIEW

Not to scale; with GNSS mast and antennas; seen from the front right and above, about 30 deg elevation

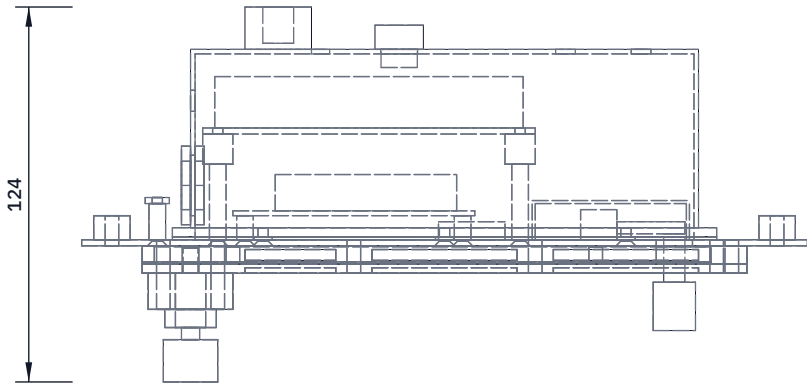

FRONT VIEW

Scale 1:2.5; looking at the front (along +Y)

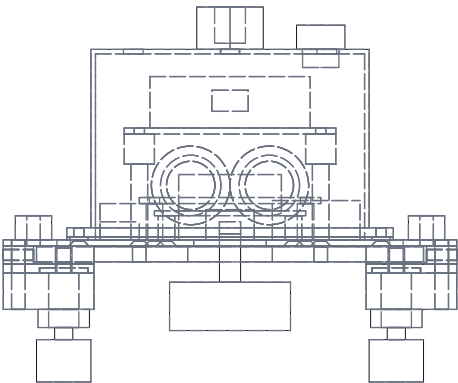

RIGHT VIEW

Scale 1:2.5; looking at the right side (along -X)

MAIN DIMENSIONS AND INTERFACES (MM)

Core plate 240 x 150 x 2, carbon; top face is the datum, Z = 0

Frame bolts 4 x M4 on 220 x 130; spacers 12 OD x 8

Frame deck opening 200 x 112 (frame repos)

Lid 168 x 92 x 62, 1.5 walls, 6 x M3 flush studs from below

Rails 200 long: spacer 10 x 6, lip 30 x 3

Shoe 184 x 128 x 5; gap to plate 0.3; slides in from the rear

Lip overlap 19 each side; payload neck within 88 wide

Two locking pins, 5 mm, at X -84, Y +/-55

DS-014 pigtail through slot 12 x 24 at X 70 to 82

GNSS top 231 above the plate; knob bottom 47 below

Rated payload 5 kg; bus 18 to 60 V; payload 100 W

Frame power leads (Lift or Range) enter via 2 grommets; strain-relief bar

Third-angle; X forward along the rail; front view from -Y

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core shared avionics and payload core: general arrangement

DRAWING NO. KWC-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2.5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha	

MATERIAL / NOTES
2 mm carbon plate, 6061 aluminium rail, printed ASA lid, bought avionics per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION