


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	Lightened under Amish's decision 33B (KWC-DDR-003)	2026-10-03	AC

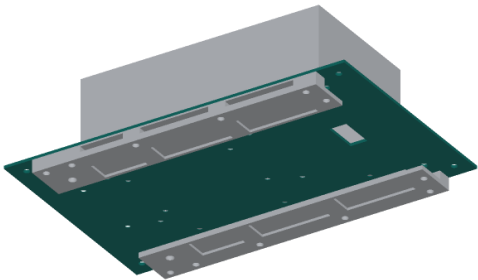


WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

240 x 150 mm, 2 mm carbon sheet, CNC-cut from the DXF. Origin at the centre;
X is positive toward the front, Y to the left; top face is the datum.
Frame holes 4.5 mm at 110 mm each side of centre, 65 mm each side (4).
Rail holes 4.5 mm on lines 70 mm each side: at -93, -75, -30, 30, 90
mm along X on both lines; stop holes 4.5 mm at 95 mm, 55 mm each side.
M3 holes 3.4 mm (16), countersunk 90 deg from the UNDERSIDE to
6.6 mm: lid flange at -60, 0, 60 mm, 50 each side; 25 mm standoffs
at -75 and 25 mm, 30 each side; 8 mm standoffs at -66 and 6 mm,
21 each side; strain-relief bar at -95 mm, 25 each side.
Cable slot 12 x 24 mm from 70 to 82 mm along X, on the centre line.
Seal the cut edges with thin epoxy; wear a mask (carbon dust).
Check: M3 countersunk heads sit flush underneath (the shoe slides
0.3 mm below); run a straight edge across; nothing proud.

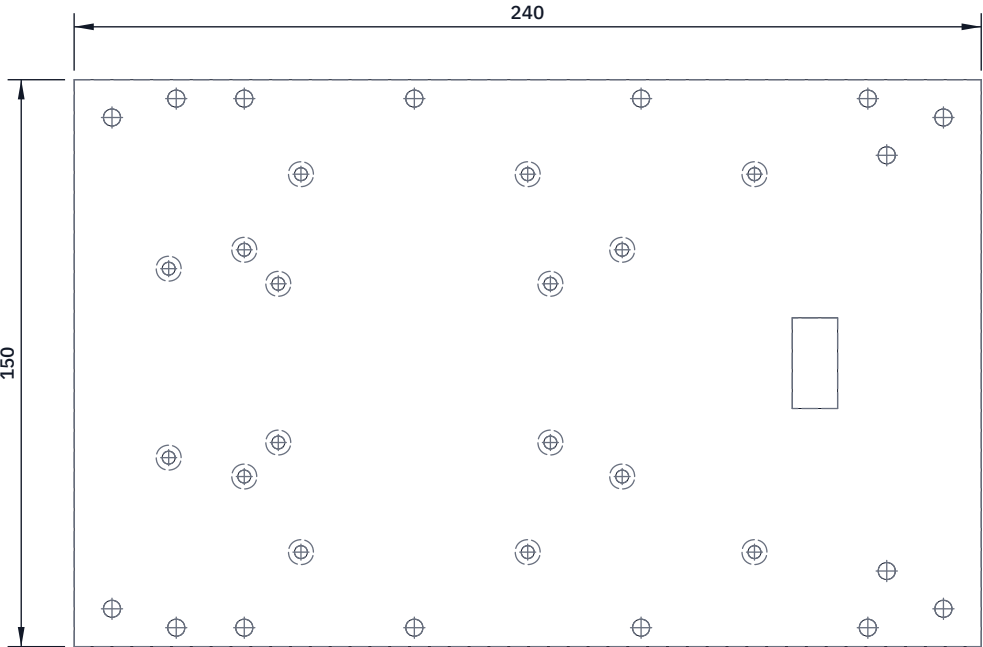

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

KITEWRIGHT CORE

github.com/BoujeeEnjinia1701/kitewright-core

Kitewright Core plate: making sketch

DRAWING NO. KWC-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Carbon fibre sheet 2 mm, 3K twill, CNC-cut					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand